# ActionJac ILAK-10 HL

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ActionJac ILAK-10 HL today!

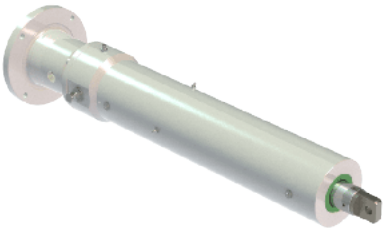

2D/3D CAD ONLINE

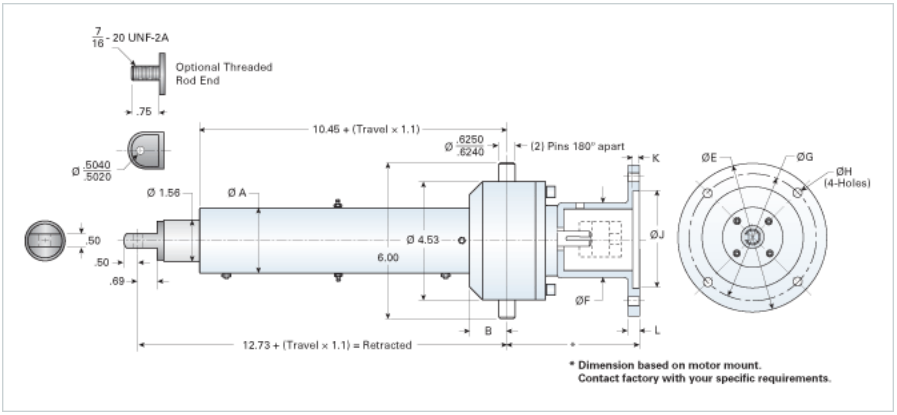


| | |
|---|---|
| **Performance Specifications** | |
| Maximum Travel Rate [in/min] | 2000 |
| Dynamic Capacity [lb] | 1200 |
| Maximum Input Torque [in-lb] | 105 |
| **Dimensions** | |
| A | 4 |
| B | 1.25 |
| C | |
| D | |
| **Details** | |
| Ball Screw | 0750-0200 SRT |
| Input Turns Per Inch Of Travel | 2 |
| Torque Per Lb. [in-lb] | 0.088 |
| Screw Lead [in] | 0.500 |
| Root Diameter [in] | 0.602 |
| Max Capacity [lb] | 1200 |
| Max HP [hp] | 2 |
| Gear Ratio | 1:1 |
| **Weight** | |
| Basic Weight [lb] | 32 |
| Per Inch of Travel [lb] | 0.98 |