
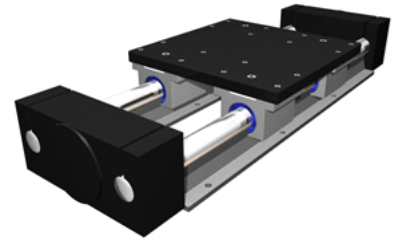


PowerTrax 251-12-LXX

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your PowerTrax 251-12-LXX today!

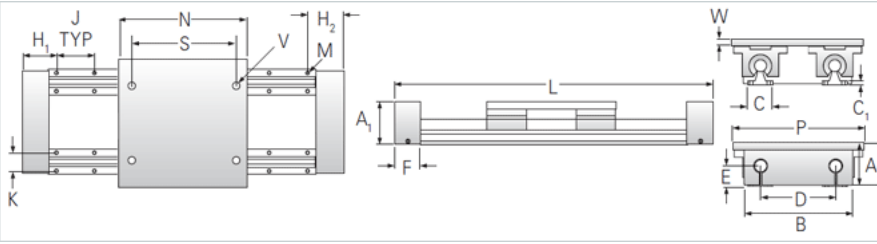

Product Info

Nominal Shaft Diameter [in] 0.75

Dimensions

| | |
|-----------------------------------|---------|
| A +/-0.003 [in] | 2.938 |
| A1 [in] | 2.75 |
| B [in] | 6.00 |
| C [in] | 1.75 |
| C1 [in] | 0.25 |
| D [in] | 4.50 |
| E [in] | 1.50 |
| F [in] | 2.0 |
| H [in] | 3.00 |
| J +/-0.010 [in] | 6.000 |
| K +/-0.010 [in] | 1.250 |
| M - Bolt | #10 |
| M - Hole [in] | 0.22 |
| N [in] | 7.50 |
| P [in] | 7.50 |
| S [in] | 6.00 |
| U [in] | 4.50 |
| V | 5/16-18 |
| W [in] | 0.50 |
| Minimum L Dimension TRAVEL + [in] | 11.5 |

Performance specifications

Load Maximum System [lbf] 2040