
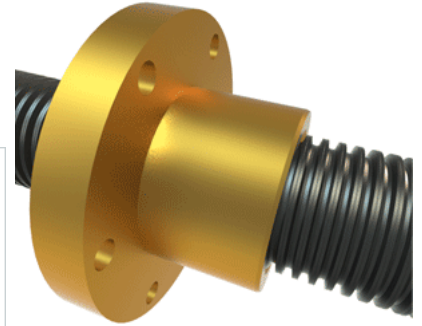


## PowerAC 6"-1 1/2 RA w/Bronze Nut, with Integral Flange

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerAC 6"-1 1/2 RA w/Bronze Nut, with Integral Flange

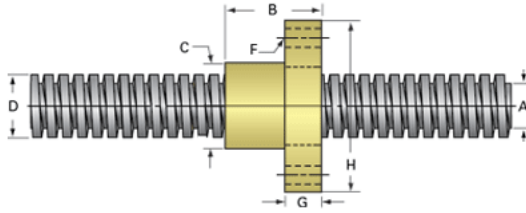

### Rolled Inch Acme Screw

#### Product Info

Screw Code	602-RA
Thread Direction	RH
Screw Material	4140 Series

#### Details

Lead [in]	0.667
Starts	1
Pitch [in]	0.667
Turns Per Inch	1.5
Threads per Inch	1.5
Thread Code	602
Form	2G
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	n/a
End Code for Type 4 [* Journals may show tracings of the thread]	n/a

#### Dimensions

A - Root Diameter Minimum [in]	
D - Nominal Rod Diameter [in]	6.000

#### Part Numbers

3 ft. Part Number	
6 ft. Part Number	12602
12 ft. Part Number	13602
20 ft. Part Number	10602

#### Performance Specifications

Lead Accuracy +/- [in/in]	0.0006
---------------------------	--------

#### Weight

Screw Weight [lb./ft.]	87.00
------------------------	-------

### Inch Acme Nut with Integral Flange

#### Product Info

Part Number	6954-1
Thread Direction	RH
Type	Bronze

#### Details

Lead [in]	0.667
Starts	1
Pitch [in]	0.667
Turns Per Inch	1.5
Lash (Maximum Axial) [in]	0.025
Nominal Rod Diameter [in]	6.000
Threads per Inch	1.5
Thread Code	602
Form	2G

#### Dimensions

B [in]	7.00
C [in]	8.00
F (n) Dia. [in]	(6) 1.125
F BCD [in]	12.000
G [in]	2.02
H [in]	14.00

#### Forces and Torques

Torque to Raise 1 lb. [in-lb]	0.474
-------------------------------	-------

#### Flange Part Numbers

Flange No-Lash Part Number	n/a
Flange Part Number	n/a

#### Weight

Flange Weight [lb]	n/a
Nut Weight [lb]	n/a

#### Performance Specifications

Efficiency [%]	22
Lead Accuracy +/- [in/in]	0.0006

---

Dynamic Load Capacity [lb]

180000

Static Load Capacity [lb]

576000

---