


## PowerTrac SGT 1250 - 0200 RH/LH

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerTrac SGT 1250 - 0200 RH/LH today!

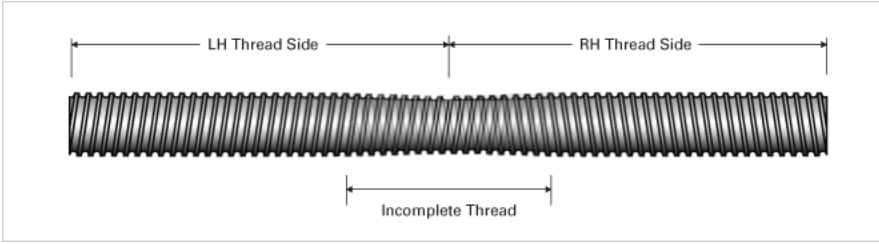

| <b>Product Info</b>   |                  |
|---|------------------|
| Screw Code  | 1250-0200 SGT TA |
| Precision   | SGT              |
| Screw Material  | 4150             |
| Thread Direction  | RH/LH            |
| <b>Details</b>  |                  |
| Ball Circle Diameter [in]   | 1.250            |
| Lead [in]   | 0.200            |
| Root Diameter [in]  | 1.115            |
| Incomplete Overlapping Thread Length [in]                               | 2.50             |
| Maximum Overall Length [in]   | 108              |
| Maximum Useable LH & RH Thread [in]                                     | 52.75            |
| End Code for Types 1,2,3,5 [* Journals may show tracings of the thread] | 25               |
| End Code for Type 4 [* Journals may show tracings of the thread]        | 16               |
| <b>Weight</b>   |                  |
| Screw Weight [lb./ft.]  | 3.70             |
| <b>Performance Specifications</b>                                       |                  |
| Lead Accuracy +/- [in./ft.]   | 0.001            |