


## PowerTrac 1500 - 1000 SRT TA, with SEL Ball Nuts, Adjustable

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your PowerTrac 1500 - 1000 SRT TA, with SEL Ball Nuts,



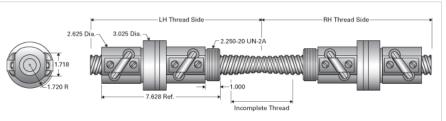

Inch Twin-Lead Ball Screw	
(Twin-Lead Screw)Product Info	
Screw Code	1500-1000 SRT TA
Precision	SRT
Screw Material	4150
Thread Direction	RH/LH
(Twin-Lead Screw)Details	
Ball Circle Diameter [in]	1.500
Lead [in]	1.000
Root Diameter [in]	1.140
Incomplete Overlapping Thread Length [in]	4.00
Maximum Overall Length [in]	192
Maximum Useable LH & RH Thread [in]	94.00
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	25
End Code for Type 4 [* Journals may show tracings of the thread]	16
(Twin-Lead Screw)Weight	
Screw Weight [lb./ft.]	4.47
(Twin-Lead Screw)Performance Specifications	1.11
Lead Accuracy +/- [in./ft.]	0.004
Inch Ball Nut, for SRT, Standard Accuracy, Preloaded, Adjustable, SEL	0.001
(Nut)Product Info	
Ball Nut Number	SEL0697
Thread Direction	LH
(Nut)Details	Li i
Ball Circle Diameter [in]	1.500
Lead [in]	1.000
Nominal Ball Diameter [in]	0.344
Root diameter [in]	1.140
(Nut)Forces and Torques	1.140
Torque to Raise 1 lb. [in-lb]	0.177
	U.177
(Nut)Flange Part Numbers Flange Part Number	FLG7777
	FLGIIII
(Nut)Wiper Part Numbers	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\
Wiper Kit Part Number	WKB2657
(Nut)Weight	0.40
Nut Weight [lb]	9.10
(Nut)Performance Specifications	0.004
Lead Accuracy +/- [in./ft.]	0.004
Maximum Adjustable Preload [lb]	1650
Spring Rate x 10 <sup>6</sup> [lb./in.]	
Dynamic Load [lb]	7560
Static Load [lb]	34662
(Nut on Other Side)Product Info	
Ball Nut Number	SEL0698
Thread Direction	RH
(Nut on Other Side)Details	
Ball Circle Diameter [in]	1.500
Lead [in]	1.000
Nominal Ball Diameter [in]	0.344
Root diameter [in]	1.140
(Nut on Other Side)Forces and Torques	
Torque to Raise 1 lb. [in-lb]	0.177
(Nut on Other Side)Flange Part Numbers	
Flange Part Number	FLG7777
(Nut on Other Side)Wiper Part Numbers	
Wiper Kit Part Number	WKB2657
(Nut on Other Side)Weight	
Nut Weight [lb]	9.10
(Nut on Other Side)Performance Specifications	0.10
Lead Accuracy +/- [in./ft.]	0.004
Maximum Adjustable Preload [lb]	1650
Maximan Aujustable i Tolodu [ib]	1000

 Spring Rate x 10<sup>6</sup> [lb./in.]
 7560

 Dynamic Load [lb]
 34662