


PowerTrac 2250 - 0500 SRT TA, with SBN Ball Nuts, Double

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your PowerTrac 2250 - 0500 SRT TA, with SBN Ball Nuts, Double

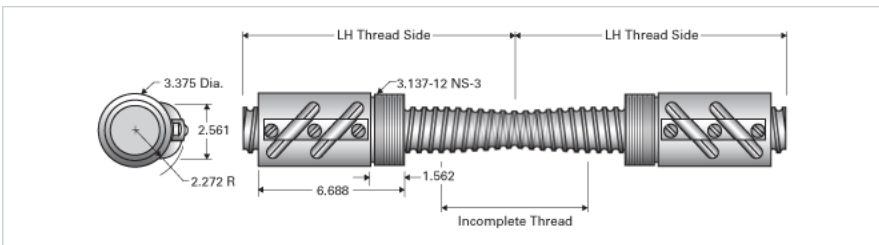

Inch Twin-Lead Ball Screw

Product Info

| | |
|------------------|------------------|
| Screw Code | 2250-0500 SRT TA |
| Precision | SRT |
| Screw Material | 4150 |
| Thread Direction | RH/LH |

Details

| | |
|---|-------|
| Ball Circle Diameter [in] | 2.250 |
| Lead [in] | 0.500 |
| Root Diameter [in] | 1.850 |
| Incomplete Overlapping Thread Length [in] | 5.00 |
| Maximum Overall Length [in] | 192 |
| Maximum Useable LH & RH Thread [in] | 93.50 |
| End Code for Types 1,2,3,5 [* Journals may show tracings of the thread] | 45 |
| End Code for Type 4 [* Journals may show tracings of the thread] | 28 |

Weight

| | |
|------------------------|-------|
| Screw Weight [lb./ft.] | 10.90 |
|------------------------|-------|

Performance Specifications

| | |
|-----------------------------|-------|
| Lead Accuracy +/- [in./ft.] | 0.004 |
|-----------------------------|-------|

Inch Ball Nut, for SRT, Standard Accuracy, No Preload, SBN, Standard

Product Info

| | |
|------------------|----------|
| Ball Nut Number | SBN10075 |
| Thread Direction | LH |

Details

| | |
|----------------------------|-------|
| Ball Circle Diameter [in] | 2.250 |
| Lead [in] | 0.500 |
| Nominal Ball Diameter [in] | 0.375 |
| Root diameter [in] | 1.850 |

Dimensions

| | |
|--------|-------|
| A [in] | 6.688 |
|--------|-------|

Forces and Torques

| | |
|-------------------------------|-------|
| Torque to Raise 1 lb. [in-lb] | 0.088 |
|-------------------------------|-------|

Flange Part Numbers

| | |
|--------------------|---------|
| Flange Part Number | FLG7574 |
|--------------------|---------|

Wiper Part Numbers

| | |
|----------------------------|---------|
| Wiper Kit Part Number | WKF0456 |
| Wiper Kit Felt Part Number | |

Weight

| | |
|-----------------|------|
| Nut Weight [lb] | 9.00 |
|-----------------|------|

Performance Specifications

| | |
|---|--------|
| Lead Accuracy +/- [in./ft.] | 0.004 |
| Maximum Adjustable Preload [lb] | |
| Spring Rate x 10 ⁶ [lb./in.] | |
| Dynamic Load [lb] | 21306 |
| Static Load [lb] | 142660 |

Inch Ball Nut, for SRT, Standard Accuracy, No Preload, SBN, Standard

Product Info

| | |
|------------------|----------|
| Ball Nut Number | SBN10074 |
| Thread Direction | RH |

Details

| | |
|----------------------------|-------|
| Ball Circle Diameter [in] | 2.250 |
| Lead [in] | 0.500 |
| Nominal Ball Diameter [in] | 0.375 |
| Root diameter [in] | 1.850 |

Dimensions

| | |
|--------|-------|
| A [in] | 6.688 |
|--------|-------|

Forces and Torques

| | |
|-------------------------------|-------|
| Torque to Raise 1 lb. [in-lb] | 0.088 |
|-------------------------------|-------|

Flange Part Numbers

| | |
|--------------------|---------|
| Flange Part Number | FLG7574 |
|--------------------|---------|

Wiper Part Numbers

| | |
|----------------------------|---------|
| Wiper Kit Part Number | WKB2659 |
| Wiper Kit Felt Part Number | |

Weight

| | |
|-----------------|------|
| Nut Weight [lb] | 9.00 |
|-----------------|------|

Performance Specifications

| | |
|---|--------|
| Lead Accuracy +/- [in./ft.] | 0.004 |
| Maximum Adjustable Preload [lb] | |
| Spring Rate x 10 ⁶ [lb./in.] | |
| Dynamic Load [lb] | 21306 |
| Static Load [lb] | 142660 |