


Maximum Adjustable Preload [lb]

## PowerTrac 1250 - 0200 SGT TA, with PRN Ball Nuts

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your PowerTrac 1250 - 0200 SGT TA, with PRN Ball Nuts today!



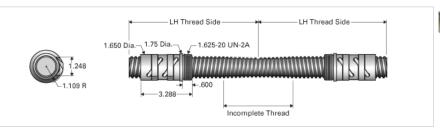



Inch Twin-Lead Ball Screw Product Info Screw Code Precision Screw Material Thread Direction	1250-0200 SGT TA
Screw Code Precision Screw Material	
Precision Screw Material	
Screw Material	COLUMN TO THE CO
	SGT
Inread Direction	4150
	RH/LH
Details	
Ball Circle Diameter [in]	1.250
Lead [in]	0.200
Root Diameter [in]	1.115
Incomplete Overlapping Thread Length [in]	2.50
Maximum Overall Length [in]	108
Maximum Useable LH & RH Thread [in]	52.75
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	25
End Code for Type 4 [* Journals may show tracings of the thread]	16
Weight	10
Screw Weight [lb./ft.]	3.70
Performance Specifications	0.10
Lead Accuracy +/- [in./ft.]	0.001
	0.001
Inch Ball Nut, for SGT, Ground Accuracy, Preloaded, Fixed, PRN	
Product Info	DDN/40400
Ball Nut Number	PRN10193
Thread Direction	LH
Details	
Ball Circle Diameter [in]	1.250
Lead [in]	0.200
Nominal Ball Diameter [in]	0.125
Root diameter [in]	1.115
Forces and Torques	
Torque to Raise 1 lb. [in-lb]	0.035
Flange Part Numbers	
Flange Part Number	-
Wiper Part Numbers	
Wiper Kit Part Number	ELASTOMER
Weight	LLASTOWLK
	1.00
Nut Weight [lb]	1.80
Performance Specifications	
Maximum Adjustable Preload [lb]	
Spring Rate x 10^6 [lb./in.]	4.25
Dynamic Load [lb]	1668
Static Load [lb]	17344
Inch Ball Nut, for SGT and XPR, Ground Accuracy, Preloaded, Fixed, PRN	
Product Info	
Ball Nut Number	PRN10191
Thread Direction	RH
Details	
Ball Circle Diameter [in]	1.250
Lead [in]	0.200
Nominal Ball Diameter [in]	0.125
Root diameter [in]	1.115
Forces and Torques	1.110
	0.035
Torque to Raise 1 lb. [in-lb]	U.Uა <del>O</del>
Flange Part Numbers	
Flange Part Number	-
Wiper Part Numbers	
Wiper Kit Part Number	ELASTOMER
Weight	
Nut Weight [lb]	1.80
Performance Specifications	

Spring Rate x 10^6 [lb./in.]	4.25
Dynamic Load [lb]	1668
Static Load [lb]	17344