


PowerTrac 2000 - 0200 SGT TA, with SSN Ball Nuts, Flanged

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your PowerTrac 2000 - 0200 SGT TA, with SSN Ball Nuts,

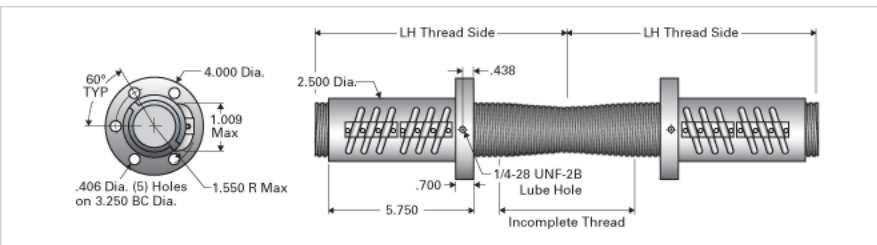

Inch Twin-Lead Ball Screw

Product Info

Screw Code	2000-0200 SGT TA
Precision	SGT
Screw Material	4150
Thread Direction	RH/LH

Details

Ball Circle Diameter [in]	2.000
Lead [in]	0.200
Root Diameter [in]	1.849
Incomplete Overlapping Thread Length [in]	0.50
Maximum Overall Length [in]	140
Maximum Useable LH & RH Thread [in]	69.75
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	45
End Code for Type 4 [* Journals may show tracings of the thread]	28

Weight

Screw Weight [lb./ft.]	9.90
------------------------	------

Performance Specifications

Lead Accuracy +/- [in./ft.]	0.001
-----------------------------	-------

Inch Ball Nut, for SGT and XPR, Ground Accuracy, Preloaded, Fixed, SSN

Product Info

Ball Nut Number	SSN10267
Thread Direction	LH

Details

Ball Circle Diameter [in]	2.000
Lead [in]	0.200
Nominal Ball Diameter [in]	0.141
Root diameter [in]	1.849

Forces and Torques

Torque to Raise 1 lb. [in-lb]	0.035
-------------------------------	-------

Flange Part Numbers

Flange Part Number	INTEGRAL
--------------------	----------

Wiper Part Numbers

Wiper Kit Part Number	ELASTOMER
-----------------------	-----------

Weight

Nut Weight [lb]	4.50
-----------------	------

Performance Specifications

Maximum Adjustable Preload [lb]	
Spring Rate x 10 ⁶ [lb./in.]	6.50
Dynamic Load [lb]	6181
Static Load [lb]	65903

Inch Ball Nut, for SGT, Ground Accuracy, Preloaded, Fixed, SSN

Product Info

Ball Nut Number	SSN0396
Thread Direction	RH

Details

Ball Circle Diameter [in]	2.000
Lead [in]	0.200
Nominal Ball Diameter [in]	0.141
Root diameter [in]	1.849

Forces and Torques

Torque to Raise 1 lb. [in-lb]	0.035
-------------------------------	-------

Flange Part Numbers

Flange Part Number	INTEGRAL
--------------------	----------

Wiper Part Numbers

Wiper Kit Part Number	ELASTOMER
-----------------------	-----------

Weight

Nut Weight [lb]	4.50
-----------------	------

Performance Specifications

Maximum Adjustable Preload [lb]	
---------------------------------	--

Spring Rate x 10⁶ [lb./in.]

6.50

Dynamic Load [lb]

6181

Static Load [lb]

65903
