


## DD-1008-SL

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your DD-1008-SL today!

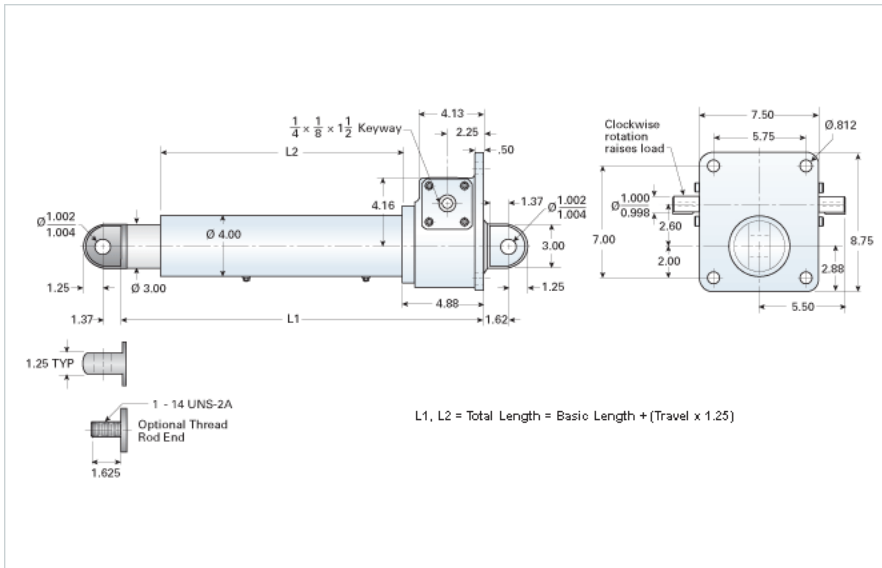

<b>Details</b>	
Gear Ratio	8:1
Max Capacity [lb]	20000
Input Turns Per Inch Of Travel	4.26
Torque To Raise 1 lb. [in-lb]	0.0598
Ball Screw	1500-1875 SRT RA
Screw Lead [in]	1.875
Root Diameter [in]	1.188
Max HP [hp]	5
<b>Weight</b>	
Basic Weight [lb]	80
Per Inch of Travel [lb]	1.92
<b>Tube Dimensions</b>	
L1 Basic Length [in]	15.25
L2 Basic Length [in]	8.88
<b>NEMA 42 Dimensions</b>	
L3 [in]	-
E [in]	-
F [in]	-
<b>NEMA 48 Dimensions</b>	
L3 [in]	-
E [in]	-
F [in]	-
<b>NEMA 56C Dimensions</b>	
L3 [in]	8.25
E [in]	4.38
F [in]	6.75
<b>NEMA 182TC Dimensions</b>	
L3 [in]	9.00
E [in]	9.25
<b>NEMA 182TC/18TCc Dimensions</b>	
F [in]	4.38
<b>NEMA 184TC Dimensions</b>	
L3 [in]	-
E [in]	-
F [in]	-
<b>NEMA 213TC Dimensions</b>	
L3 [in]	-
E [in]	-
F [in]	-