Product Specification Sheet

DD-520-A8

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your DD-520-A8 today!

2D/3D CAD ONLINE

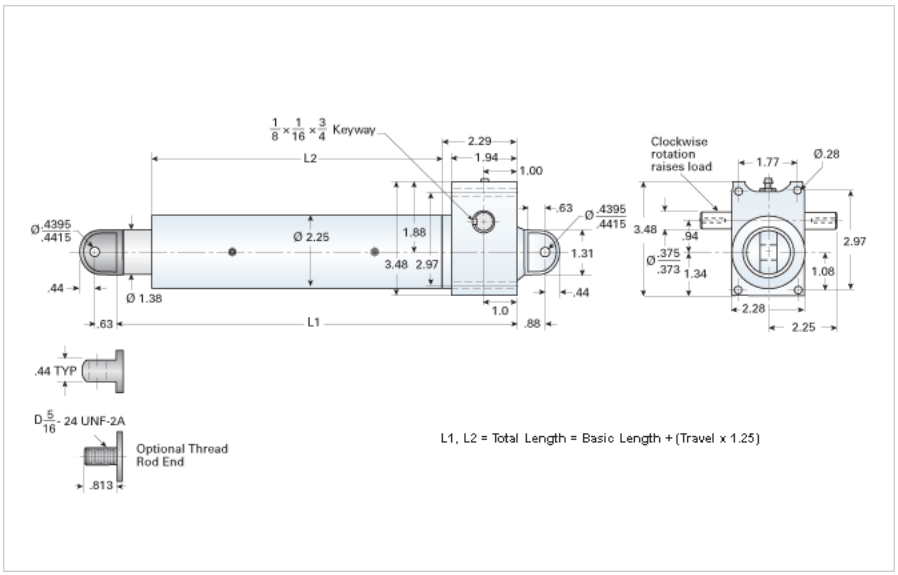

Details	
Gear Ratio	20:1
Max Capacity [lb]	1000
Input Turns Per Inch Of Travel	160
Torque To Raise 1 lb. [in-lb]	0.007
Acme Screw	5/8-8 RA
Screw Lead [in]	0.125
Root Diameter [in]	0.457
Max HP [hp]	0.16
Weight	
Basic Weight [lb]	11
Per Inch of Travel [lb]	0.64
Tube Dimensions	
L1 Basic Length [in]	7.38
L2 Basic Length [in]	3.88
NEMA 42 Dimensions	
L3 [in]	4.48
E [in]	4.63
F [in]	2.69
NEMA 48 Dimensions	
L3 [in]	4.48
E [in]	4.63
F [in]	3.12
NEMA 56C Dimensions	
L3 [in]	-
E [in]	-
F [in]	-
NEMA 182TC Dimensions	
L3 [in]	-
E [in]	-
F [in]	-
NEMA 184TC Dimensions	
L3 [in]	-
E [in]	-
F [in]	-
NEMA 213TC Dimensions	
L3 [in]	-
E [in]	-
F [in]	-