


RAD-2546-A4

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your RAD-2546-A4 today!

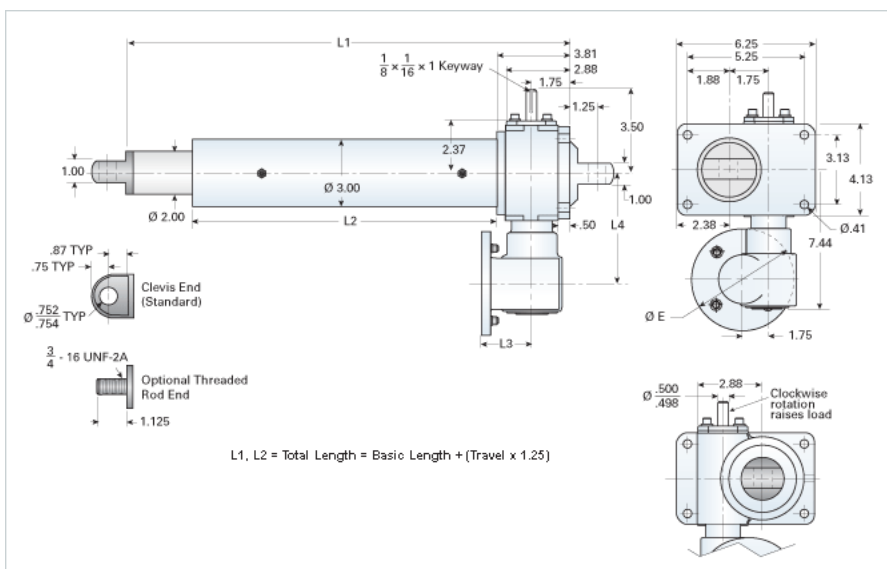

Details

Gear Ratio Primary Reduction	24:1
Gear Ratio Secondary Reduction	6:1
Max Capacity [lb]	5000
Input Turns per Inch of Travel	576
Torque to Raise 1 lb. [in-lb]	0.0027
Acme Screw	1-4 RA
Screw Lead [in]	0.250
Root Diameter [in]	0.698
Max HP [hp]	0.33

Weight

Basic Weight [lb]	44
Per Inch of Travel [lb]	1.00

Tube Dimensions

$L1$ Basic Length [in]	10.38
$L2$ Basic Length [in]	4.75

NEMA 56C Dimensions

$L3$ [in]	3.69
$L4$ [in]	5.63
E [in]	6.69

NEMA 180TC Dimensions

$L3$ [in]	-
$L4$ [in]	-
F [in]	-