
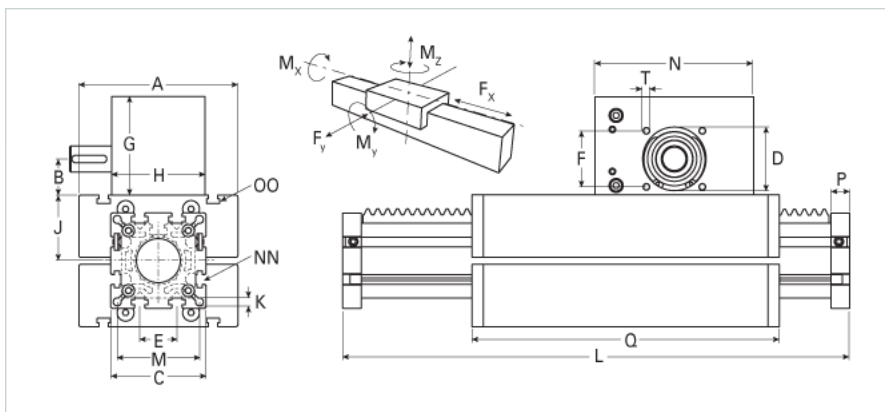


ELZA 60 WAC Extended Carriage

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ELZA 60 WAC Extended Carriage today!

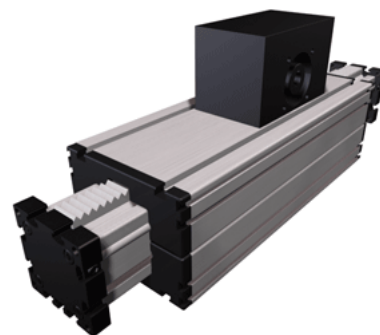

| | |
|---|--------|
| Details | |
| Size | 60 |
| Dimensions | |
| Basic Length L [mm] | 256 |
| A [mm] | 144 |
| B [mm] | 28.0 |
| C [mm] | 82 |
| D [mm] | 47 |
| E [mm] | 30 |
| F [mm] | 42 |
| G [mm] | 75 |
| H [mm] | 63 |
| I [mm] | - |
| J [mm] | 49 |
| K [mm] | 8.5 |
| M [mm] | 69 |
| MM | - |
| N [mm] | 130 |
| NN | M8 |
| OO | M8 |
| P [mm] | 16 |
| Q [mm] | 319 |
| T | M6 |
| X [mm] | - |
| Speed | |
| Speed Maximum [m/s] | 2.5 |
| Forces and Torques | |
| Fx dynamic [N] | 1200 |
| Fy dynamic [N] | 2000 |
| Fz dynamic [N] | 1100 |
| Mx dynamic [Nm] | 43 |
| My dynamic [Nm] | 70 |
| Mz dynamic [Nm] | 100 |
| Fx static [N] | 1500 |
| Fy static [N] | 3000 |
| Fz static [N] | 1700 |
| Mx static [Nm] | 67 |
| My static [Nm] | 90 |
| Mz static [Nm] | 120 |
| Geometrical moments of inertia of aluminum profile | |
| Elastic modulus [N/mm ²] | 70000 |
| Ix [mm ⁴] | 679000 |
| Iy [mm ⁴] | 697000 |
| Weight | |
| Additional Weight per 100 mm [kg] | 0.68 |
| Basic Weight [kg] | 5.3 |