
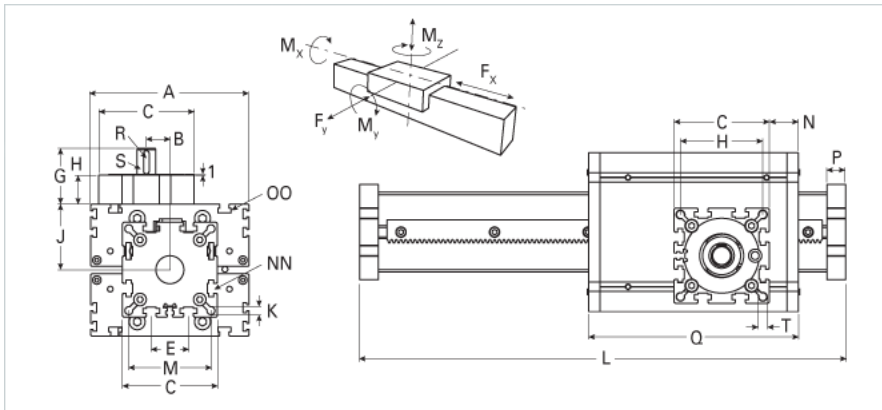


ELZQ 80 h6 WAC

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ELZQ 80 h6 WAC today!

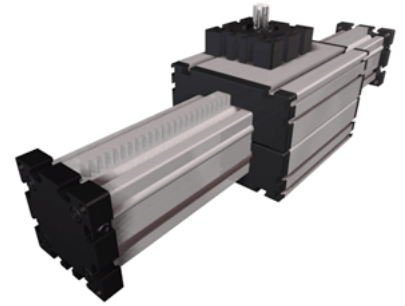

Details

Size

80

Dimensions

Basic Length L [mm]

276

A [mm]

170

B [mm]

25.5

C [mm]

102

D [mm]

80

E [mm]

40

G [mm]

60.5

H [mm]

31

J [mm]

70

K [mm]

8.8

M [mm]

88

N [mm]

25

NN

M10

OO

M10

P [mm]

20

Q [mm]

230

T

M10

Speed

Speed Maximum [m/s]

4

Forces and Torques

Fx dynamic [N]

1400

Fy dynamic [N]

2000

Fz dynamic [N]

1100

Mx dynamic [Nm]

55

My dynamic [Nm]

80

Mz dynamic [Nm]

120

Fx static [N]

1800

Fy static [N]

3000

Fz static [N]

1700

Mx static [Nm]

90

My static [Nm]

110

Mz static [Nm]

150

Geometrical moments of inertia of aluminum profile

Elastic modulus [N/mm²]

70000

Ix [mm⁴]

1899000

Iy [mm⁴]

1897000

Weight

Additional Weight per 100 mm [kg]

1.19

Basic Weight [kg]

11.0