




CCT28-HD F

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your CCT28-HD F today!



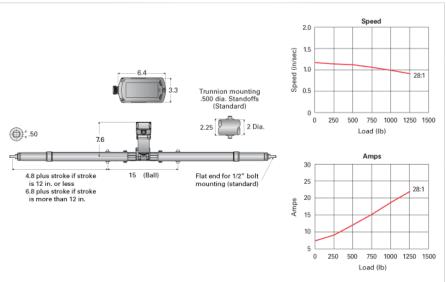

| Product Info | |
|--|------------------|
| Screw Type | Ball Screw |
| Details | |
| Screw Size | 0631-0200 SRT RA |
| Voltage | 12 VDC Hi Speed |
| Gear Ratio | 28:1 |
| Load Capacity [lb] | 1250 |
| Speed [in/sec] | 0.9 |
| Amps | 23 |
| Trunnion -Trunnion [in] | 15.5 |
| Performance Specifications | |
| Duty Cycle [% of 5 Minutes] | 25 |
| Protection Class | IP54 |
| Maximum Temperature Range [F°] | 160 |
| Minimum Temperature Range [F°] | -30 |
| the contract of the contract o | |