

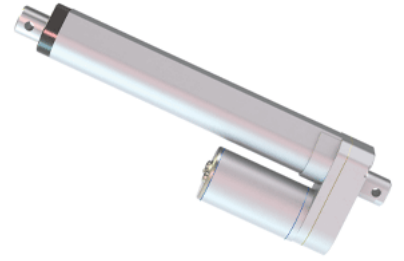



VMD3-24-30

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your VMD3-24-30 today!



| | Retracted Length A (± 3.8 mm) | | | | | | B | C | D |
|--------------------------------|------------------------------------|-----|-----|-----|-----|-----|-----|----|----|
| Travel (in) | 2 | 4 | 6 | 8 | 10 | 12 | — | — | — |
| Travel (± 5 mm) | 50 | 100 | 150 | 200 | 250 | 300 | — | — | — |
| Standard | 158 | 209 | 260 | 311 | 362 | 413 | 95 | 72 | 40 |
| With Potentiometer | 195 | 246 | 297 | 348 | 399 | 450 | 132 | 72 | 40 |
| With Hall Effect Sensor | 158 | 209 | 260 | 311 | 362 | 413 | 113 | 90 | 42 |

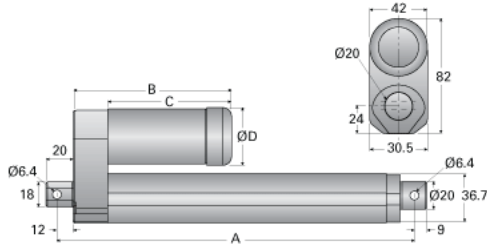

Product Info

Screw Type

Acme Screw

Details

Voltage [VDC]

24

Gear Ratio

30:1

Speed [mm/s]

9

Load Capacity Rated Load [N]

700

Load Capacity Maximum Load [N]

800

Amps

1.5

Performance Specifications

Duty Cycle [% of 5 Minutes]

25

Protection Class

IP65