


## 252-08-LXX/051 RA

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your 252-08-LXX/051 RA today!

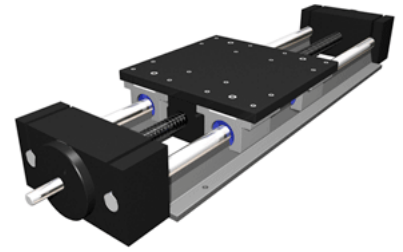

### Product Info

|                             |       |
|-----------------------------|-------|
| Nominal Shaft Diameter [in] | 0.50  |
| Screw Type                  | Acme  |
| Screw Size                  | 1/2-1 |

### Dimensions

|                 |            |
|-----------------|------------|
| A +/-0.003 [in] | 2.187      |
| A1 [in]         | 2.13       |
| B [in]          | 4.25       |
| C [in]          | 1.50       |
| C1 [in]         | 0.19       |
| D [in]          | 3.25       |
| E [in]          | 1.13       |
| F [in]          | 1.5        |
| H [in]          | 2.00       |
| J +/-0.010 [in] | 4.000      |
| K +/-0.010 [in] | 1.000      |
| M - Bolt        | #6         |
| M - Hole [in]   | 0.17       |
| N [in]          | 5.50       |
| P [in]          | 5.50       |
| S [in]          | 4.50       |
| U [in]          | 3.25       |
| V               | 1/4-20     |
| W [in]          | 0.38       |
| X [in]          | 1.00       |
| Y [in]          | 0.250      |
| Z               | .51 x .095 |
| A2 [in]         | 0.665      |

### Dimensions

|                                   |     |
|-----------------------------------|-----|
| Minimum L Dimension TRAVEL + [in] | 8.5 |
|-----------------------------------|-----|

### Performance specifications

|                           |     |
|---------------------------|-----|
| Load Maximum System [lbf] | 760 |
|---------------------------|-----|