
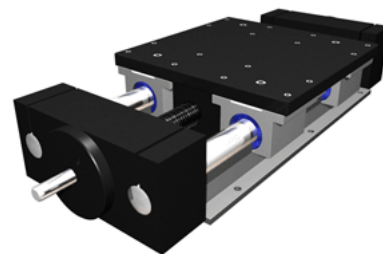


## 252-16-LXX/1000-0250 SRT RA

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your 252-16-LXX/1000-0250 SRT RA today!

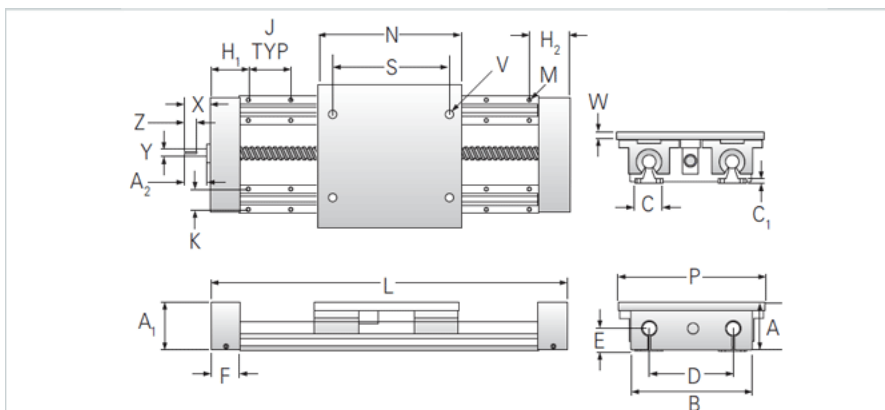

### Product Info

|                             |               |
|-----------------------------|---------------|
| Nominal Shaft Diameter [in] | 1.00          |
| Screw Type                  | Ball          |
| Screw Size                  | 1000-0250 SRT |

### Dimensions

|                 |             |
|-----------------|-------------|
| A +/-0.003 [in] | 3.438       |
| A1 [in]         | 3.25        |
| B [in]          | 7.25        |
| C [in]          | 2.13        |
| C1 [in]         | 0.25        |
| D [in]          | 5.50        |
| E [in]          | 1.75        |
| F [in]          | 2.2         |
| H [in]          | 3.00        |
| J +/-0.010 [in] | 6.000       |
| K +/-0.010 [in] | 1.500       |
| M - Bolt        | 1/4         |
| M - Hole [in]   | 0.28        |
| N [in]          | 9.00        |
| P [in]          | 9.00        |
| S [in]          | 7.00        |
| U [in]          | 5.50        |
| V               | 3/8-16      |
| W [in]          | 0.50        |
| X [in]          | 1.74        |
| Y [in]          | 0.625       |
| Z               | 1.03 x .188 |
| A2 [in]         | 1.260       |

### Dimensions

|                                   |      |
|-----------------------------------|------|
| Minimum L Dimension TRAVEL + [in] | 13.4 |
|-----------------------------------|------|

### Performance specifications

|                           |      |
|---------------------------|------|
| Load Maximum System [lbf] | 3320 |
|---------------------------|------|