


## MBN16x16R-3VW

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your MBN16x16R-3VW today!

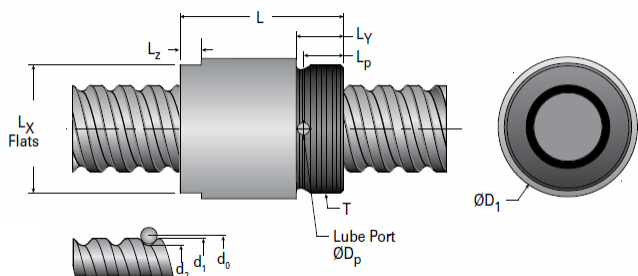

### Product Info

Nominal Rod Diameter [mm]	16
Material	Alloy
Thread Direction	RH

### Details

Lead [mm]	16
Active Turns	3
Nominal Ball Dia. [mm]	3.175
Screw Weight [kg/m]	1.17
Nut Weight [kg]	0.18
End Code for Types 1,2, and 3	12
End Code for Types 4	6
End Code for Types 5	12
End Code for Types 6	12
End Code for Types 7	10

### Performance Specifications

Dynamic Load Ca [N]	7400
Static Load [N]	11780
Linear Speed (Based on DN Values) [mm/min]	70000

### Screw Dimensions

d0 [mm]	16
d1 [mm]	15.33
d2 [mm]	12.72

### Nut Dimensions

D1 (h8) [mm]	38
L [mm]	33
Lx [mm]	35
LY [mm]	13
Lz [mm]	20
Lp [mm]	11
Dp [mm]	2.7
T (6g)	M35 x 1.5