
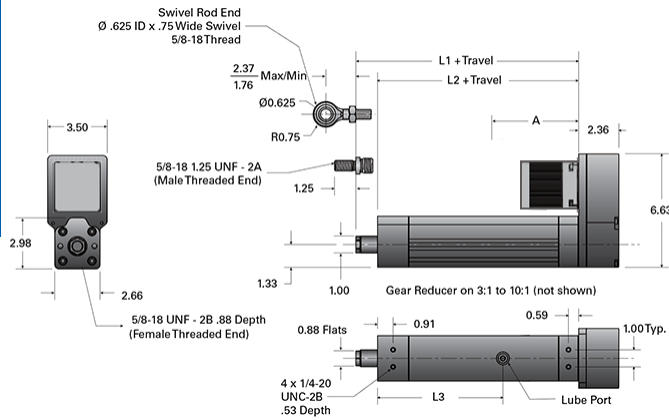


## PA05-P 0750-0200 SRT RA T

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PA05-P 0750-0200 SRT RA T today!



### Details

|                           |                  |
|---------------------------|------------------|
| Screw                     | 0750-0200 SRT RA |
| Ball Circle Diameter [in] | 0.750            |
| Screw Lead [in]           | 0.200            |

### Performance Specifications

|  |       |
|--|-------|
| Lead Accuracy +/- [in/in]  | 0.004 |
| Efficiency [%]   | >90   |
| Ball Nut Max Velocity [in/min]   | 800   |
| Max Capacity [lb]  | 1000  |
| Dynamic Load [lb] (Ball screw L10 life based on 1 mil. Inches of travel) | 1100  |

### Dimensions

|                                  |                       |
|----------------------------------|-----------------------|
| L1 + Travel [in]                 | 9.05                  |
| L2 + Travel [in]                 | 7.78                  |
| A (w/out Reducer, No Brake) [in] | T23 3.03 / T34 4.96   |
| A (w/out Reducer, Brake) [in]    | T23B 4.32 / T34B 6.44 |
| A (w/Reducer, No Brake) [in]     | T23 5.49 / T34 8.29   |
| A (w/Reducer, Brake) [in]        | T23B 6.78 / T34B 9.77 |