



NMRU 3ML SS Assembly

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NMRU 3ML SS Assembly today!

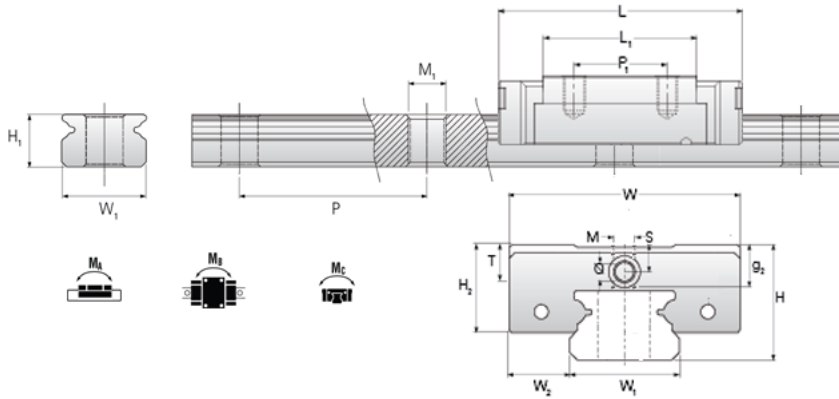

| | |
|--|-------------|
| Dimensions | |
| H [mm] | 4 |
| W2 [mm] | 2.5 |
| Standard Miniature Block Two Axial Mounting Holes | |
| Details | |
| Size [mm] | 3 |
| Dimensions | |
| W [mm] | 8 |
| L [mm] | 16 |
| L1 [mm] | 10 |
| h2 [mm] | 3 |
| P1 [mm] | 5.5 |
| M x g2 | M2 x 1.1 |
| Ø | 0.3 |
| S | 0.7 |
| T | 1.5 |
| Forces and Torques | |
| Basic Load Ratings C [N] | 295 |
| Basic Load Ratings C0 [N] | 575 |
| Static Moment Ratings-Ma [N-m] | 1.1 |
| Static Moment Ratings-Mb [N-m] | 1.1 |
| Static Moment Ratings-Mc [N-m] | 0.9 |
| Weight | |
| Weight-Block [g] | 1.2 |
| Standard Miniature Rail Bottom Tapped Mount | |
| Details | |
| Size [mm] | 3 |
| Dimensions | |
| H1 [mm] | 2.6 |
| W1 [mm] | 3 |
| P [mm] | 10 |
| M1 | M1.6 x 0.35 |
| Weight | |
| Weights-Rail [g/m] | 53.0 |