

M

Ó


g,




## NMR 12MN SUE Assembly

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NMR 12MN SUE Assembly today!



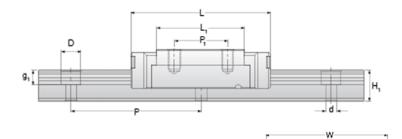



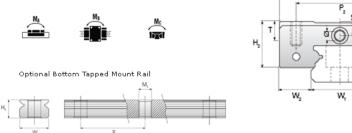

| Dimensions                                   |              |
|--|--------------|
| H [mm]                                       | 13           |
| W2 [mm]                                      | 7.5          |
| Standard Miniature Block Four Mounting Holes | 7.5          |
| (Runner Block)Details                        |              |
| Size [mm]                                    | 12           |
| (Runner Block)Dimensions                     | 12           |
| W [mm]                                       | 27           |
|  | 36.8         |
| L1 [mm]                                      | 22           |
| h2 [mm]                                      | 10.6         |
| P1 [mm]                                      | 15           |
| P2 [mm]                                      | 20           |
| $M \times g2$                                | <br>M3 × 3.5 |
| Ø [mm]                                       | 1.3          |
| S [mm]                                       | 3.2          |
|  | 4.3          |
| T [mm]<br>(Runner Block)Forces and Torques   | 4.0          |
| Basic Load Ratings C [N]                     | 2308         |
| Basic Load Ratings C0 [N]                    | 3465         |
| Static Moment Ratings-Ma [N-m]               | 12.9         |
| Static Moment Ratings-Ma [N-m]               | 12.9         |
| Static Moment Ratings-Mc [N-m]               | 21.5         |
| (Runner Block)Weight                         | 21.0         |
| Weight-Block [g]                             | 34           |
| Standard Miniature Rail Top Mount            | 34           |
| (Top Mount Rail)Details                      |              |
| Size [mm]                                    | 12           |
| (Top Mount Rail)Dimensions                   | 12           |
| H [mm]                                       | 13           |
| W1 [mm]                                      | 12           |
| H1 [mm]                                      | 7.5          |
| P [mm]                                       | 25           |
| D [mm]                                       | 6            |
| d1 [mm]                                      | 3.5          |
| g1 [mm]                                      | 4.5          |
| (Top Mount Rail)Weight                       | 4.5          |
| Weights-Rail [g/m]                           | 602.0        |
| Standard Miniature Rail Bottom Tapped Mount  | 002.0        |
| (Bottom Mount Rail)Details                   |              |
| Size [mm]                                    | 12           |
| (Bottom Mount Rail)Dimensions                | 12           |
| H1 [mm]                                      | 7.5          |
| W1 [mm]                                      | 12           |
| P [mm]                                       | 25           |
| M1   | M4 x 0.7     |
| (Bottom Mount Rail)Weight                    |              |
| Weights-Rail [g/m]                           | 602.0        |
| wolgino-rai [gini]                           | 002.0        |
|  |              |