

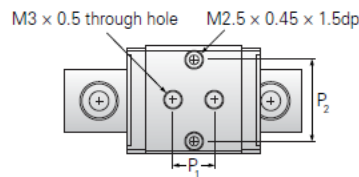
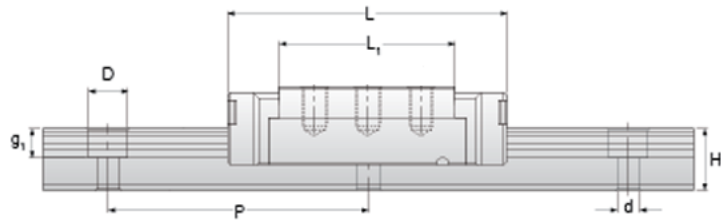


NMR 5WNC SS Assembly

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NMR 5WNC SS Assembly today!

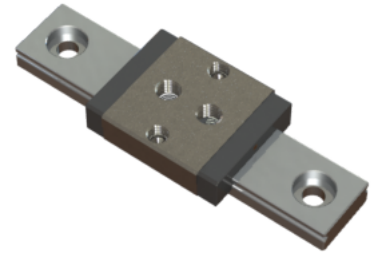

Optional Bottom Tapped Mount Rail



Dimensions

| | |
|---------|-----|
| H [mm] | 6.5 |
| W2 [mm] | 3.5 |

Wide Miniature Block Four Mounting Holes

Details

| | |
|-----------|---|
| Size [mm] | 5 |
|-----------|---|

Dimensions

| | |
|---------|-----------------|
| W [mm] | 17 |
| L [mm] | 21.1 |
| L1 [mm] | 15.1 |
| h2 [mm] | 5 |
| P1 [mm] | 6.5 |
| P2 [mm] | 13 |
| M x g2 | M3 / M2.5 x 1.5 |
| Ø [mm] | 0.9 |
| S [mm] | 1.2 |
| T [mm] | 2.3 |

Forces and Torques

| | |
|--------------------------------|-----|
| Basic Load Ratings C [N] | 475 |
| Basic Load Ratings C0 [N] | 900 |
| Static Moment Ratings-Ma [N-m] | 2.2 |
| Static Moment Ratings-Mb [N-m] | 2.2 |
| Static Moment Ratings-Mc [N-m] | 4.6 |

Weight

| | |
|------------------|---|
| Weight-Block [g] | 6 |
|------------------|---|

Wide Miniature Rail Top Mount Single Row

Details

| | |
|-----------|---|
| Size [mm] | 5 |
|-----------|---|

Dimensions

| | |
|---------|-----|
| H [mm] | 6.5 |
| W1 [mm] | 10 |
| H1 [mm] | 4 |
| P [mm] | 20 |
| D [mm] | 5.5 |
| d1 [mm] | 3 |
| g1 [mm] | 1.6 |

Weight

| | |
|--------------------|-------|
| Weights-Rail [g/m] | 280.0 |
|--------------------|-------|

Wide Miniature Rail Bottom Tapped Mount Single Row

Details

| | |
|-----------|---|
| Size [mm] | 5 |
|-----------|---|

Dimensions

| | |
|---------|----------|
| H1 [mm] | 5.2 |
| W1 [mm] | 14 |
| P [mm] | 30 |
| M1 | M4 x 0.7 |

Weight

