
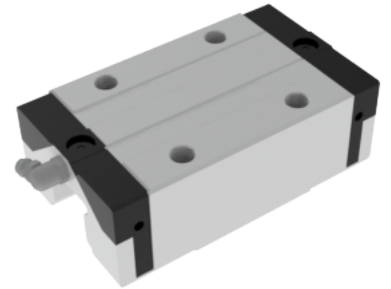



NARC 25 MN

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NARC 25 MN today!



| | |
|--------------------------------|----------|
| Details | |
| Size [mm] | 25 |
| Dimensions | |
| W [mm] | 48 |
| L [mm] | 81.2 |
| L1 [mm] | 62.2 |
| h2 [mm] | 27 |
| P1 [mm] | 35 |
| P2 [mm] | 35 |
| M1 [mm] | — |
| M × g2 | M6 × 9 |
| T [mm] | 8 |
| N1 | M6 × 7.5 |
| N2 | M3 × 6.5 |
| N3 [O-Ring Seal] | P4 |
| E [mm] | 12 |
| S1 [mm] | 5 |
| S2 [mm] | 9.3 |
| S3 [mm] | 16.6 |
| S4 [mm] | 17.6 |
| Forces and Torques | |
| Basic Load Ratings C [kN] | 24.8 |
| Basic Load Ratings C0 [kN] | 42.5 |
| Static Moment Ratings-Ma [N-m] | 385.0 |
| Static Moment Ratings-Mb [N-m] | 385.0 |
| Static Moment Ratings-Mc [N-m] | 540.0 |
| Weight | |
| Weight-Block [g] | 420 |