
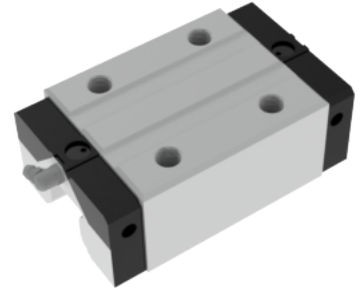



NARC 30 MN

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NARC 30 MN today!



| | |
|--------------------------------|----------|
| Details | |
| Size [mm] | 30 |
| Dimensions | |
| W [mm] | 60 |
| L [mm] | 95.5 |
| L1 [mm] | 71.5 |
| h2 [mm] | 35.2 |
| P1 [mm] | 40 |
| P2 [mm] | 40 |
| M1 [mm] | — |
| M × g2 | M8 × 10 |
| T [mm] | 12 |
| N1 | M6 × 8.5 |
| N2 | M6 × 5 |
| N3 [O-Ring Seal] | P5 |
| E [mm] | 12 |
| S1 [mm] | 7.5 |
| S2 [mm] | 12 |
| S3 [mm] | 20.8 |
| S4 [mm] | 20.5 |
| Forces and Torques | |
| Basic Load Ratings C [kN] | 32.8 |
| Basic Load Ratings C0 [kN] | 53.7 |
| Static Moment Ratings-Ma [N-m] | 565.0 |
| Static Moment Ratings-Mb [N-m] | 565.0 |
| Static Moment Ratings-Mc [N-m] | 845.0 |
| Weight | |
| Weight-Block [g] | 800 |