
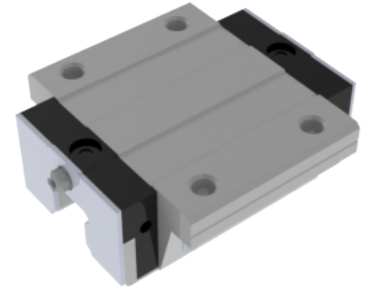



NARC 15 FN

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NARC 15 FN today!



| | |
|--------------------------------|--------------|
| Details | |
| Size [mm] | 15 |
| Dimensions | |
| W [mm] | 52 |
| L [mm] | 55.5 |
| L1 [mm] | 40.3 |
| h2 [mm] | 20.7 |
| P1 [mm] | 26 |
| P2 [mm] | 41 |
| M1 [mm] | M4 Thru Bolt |
| M x g2 | M5 x 7 |
| T [mm] | 7 |
| N1 | M3 x 6.5 |
| N2 | M3 x 6 |
| N3 [O-Ring Seal] | P3 |
| E [mm] | 3.5 |
| S1 [mm] | 4.5 |
| S2 [mm] | 7.5 |
| S3 [mm] | 8.9 |
| S4 [mm] | 10.9 |
| Forces and Torques | |
| Basic Load Ratings C [kN] | 9.9 |
| Basic Load Ratings C0 [kN] | 17.5 |
| Static Moment Ratings-Ma [N-m] | 105.0 |
| Static Moment Ratings-Mb [N-m] | 105.0 |
| Static Moment Ratings-Mc [N-m] | 140.0 |
| Weight | |
| Weight-Block [g] | 184 |