
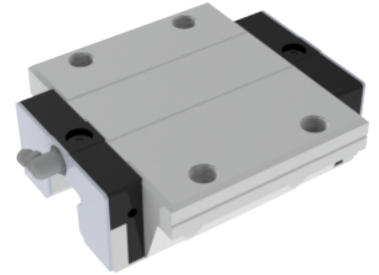



## NARC 25 FN

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your NARC 25 FN today!



|                                |              |
|--------------------------------|--------------|
| <b>Details</b>                 |              |
| Size [mm]                      | 25           |
| <b>Dimensions</b>              |              |
| W [mm]                         | 73           |
| L [mm]                         | 81.2         |
| L1 [mm]                        | 62.2         |
| h2 [mm]                        | 27           |
| P1 [mm]                        | 35           |
| P2 [mm]                        | 60           |
| M1 [mm]                        | M6 Thru Bolt |
| M x g2                         | M8 x 12      |
| T [mm]                         | 12           |
| N1                             | M6 x 7.5     |
| N2                             | M3 x 6.5     |
| N3 [O-Ring Seal]               | P4           |
| E [mm]                         | 12           |
| S1 [mm]                        | 5            |
| S2 [mm]                        | 9.3          |
| S3 [mm]                        | 16.6         |
| S4 [mm]                        | 17.6         |
| <b>Forces and Torques</b>      |              |
| Basic Load Ratings C [kN]      | 24.8         |
| Basic Load Ratings C0 [kN]     | 42.5         |
| Static Moment Ratings-Ma [N-m] | 385.0        |
| Static Moment Ratings-Mb [N-m] | 385.0        |
| Static Moment Ratings-Mc [N-m] | 540.0        |
| <b>Weight</b>                  |              |
| Weight-Block [g]               | 524          |