
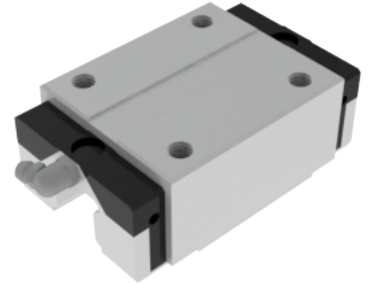



## NHRC 20 MN

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your NHRC 20 MN today!



|                                |          |
|--------------------------------|----------|
| <b>Details</b>                 |          |
| Size [mm]                      | 20       |
| <b>Dimensions</b>              |          |
| W [mm]                         | 44       |
| L [mm]                         | 70.2     |
| L1 [mm]                        | 52       |
| h2 [mm]                        | 24.5     |
| P1 [mm]                        | 36       |
| P2 [mm]                        | 32       |
| M1 [mm]                        | —        |
| M × g2                         | M5 × 8.5 |
| T [mm]                         | 8        |
| N1                             | M3 × 7.5 |
| N2                             | M3 × 5.5 |
| N3 [O-Ring Seal]               | P4       |
| E [mm]                         | 10       |
| S1 [mm]                        | 6        |
| S2 [mm]                        | 9.4      |
| S3 [mm]                        | 11       |
| S4 [mm]                        | 11.7     |
| <b>Forces and Torques</b>      |          |
| Basic Load Ratings C [kN]      | 17.1     |
| Basic Load Ratings C0 [kN]     | 30       |
| Static Moment Ratings-Ma [N-m] | 230.0    |
| Static Moment Ratings-Mb [N-m] | 230.0    |
| Static Moment Ratings-Mc [N-m] | 325.0    |
| <b>Weight</b>                  |          |
| Weight-Block [g]               | 318      |