
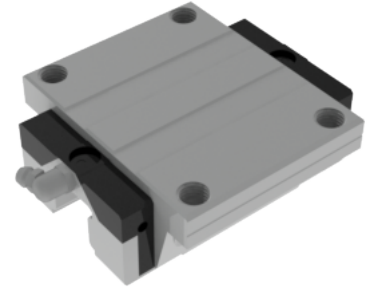



NHRC 20 FN

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NHRC 20 FN today!



| | |
|--------------------------------|----------|
| Details | |
| Size [mm] | 20 |
| Dimensions | |
| W [mm] | 63 |
| L [mm] | 69 |
| L1 [mm] | 52 |
| h2 [mm] | 25 |
| P1 [mm] | 40 |
| P2 [mm] | 53 |
| M1 [mm] | M5 |
| M x g2 | M6 x 10 |
| T [mm] | 10 |
| N1 | M3 x 7.5 |
| N2 | M3 x 5.5 |
| N3 [O-Ring Seal] | P4 |
| E [mm] | 10 |
| S1 [mm] | 6 |
| S2 [mm] | 9.4 |
| S3 [mm] | 9 |
| S4 [mm] | 9.7 |
| Forces and Torques | |
| Basic Load Ratings C [kN] | 17.1 |
| Basic Load Ratings C0 [kN] | 30 |
| Static Moment Ratings-Ma [N-m] | 230.0 |
| Static Moment Ratings-Mb [N-m] | 230.0 |
| Static Moment Ratings-Mc [N-m] | 325.0 |
| Weight | |
| Weight-Block [g] | 396 |