
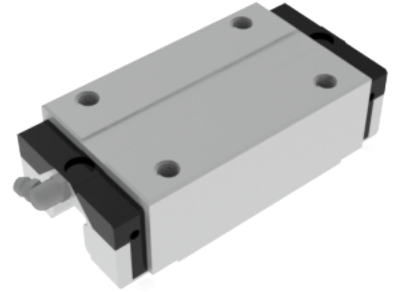



NHRC 20 ML

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NHRC 20 ML today!



Details

Size [mm] 20

Dimensions

W [mm] 44
 L [mm] 87.2
 L1 [mm] 70.2
 h2 [mm] 25
 P1 [mm] 50
 P2 [mm] 32
 M1 [mm] —
 M × g2 M5 × 8.5
 T [mm] 6
 N1 M3 × 7.5
 N2 M3 × 5.5
 N3 [O-Ring Seal] P4
 E [mm] 10
 S1 [mm] 6
 S2 [mm] 9.4
 S3 [mm] 13.1
 S4 [mm] 13.8

Forces and Torques

Basic Load Ratings C [kN] 20.4
 Basic Load Ratings C0 [kN] 38.5
 Static Moment Ratings-Ma [N-m] 390.0
 Static Moment Ratings-Mb [N-m] 390.0
 Static Moment Ratings-Mc [N-m] 415.0

Weight

Weight-Block [g] 142