
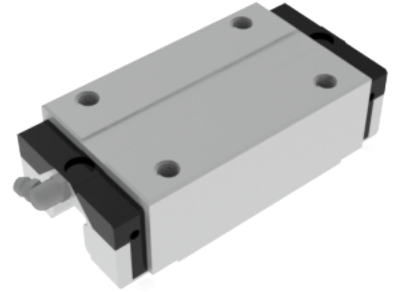



## NHRC 20 ML

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your NHRC 20 ML today!



<b>Details</b>	
Size [mm]	20
<b>Dimensions</b>	
W [mm]	44
L [mm]	87.2
L1 [mm]	70.2
h2 [mm]	25
P1 [mm]	50
P2 [mm]	32
M1 [mm]	—
M × g2	M5 × 8.5
T [mm]	6
N1	M3 × 7.5
N2	M3 × 5.5
N3 [O-Ring Seal]	P4
E [mm]	10
S1 [mm]	6
S2 [mm]	9.4
S3 [mm]	13.1
S4 [mm]	13.8
<b>Forces and Torques</b>	
Basic Load Ratings C [kN]	20.4
Basic Load Ratings C0 [kN]	38.5
Static Moment Ratings-Ma [N-m]	390.0
Static Moment Ratings-Mb [N-m]	390.0
Static Moment Ratings-Mc [N-m]	415.0
<b>Weight</b>	
Weight-Block [g]	142