
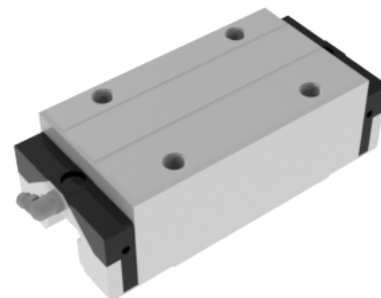



## NHRC 25 ML

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your NHRC 25 ML today!



<b>Details</b>	
Size [mm]	25
<b>Dimensions</b>	
W [mm]	48
L [mm]	105
L1 [mm]	86
h2 [mm]	34
P1 [mm]	50
P2 [mm]	35
M1 [mm]	—
M × g2	M6 × 9
T [mm]	12
N1	M6 × 7.5
N2	M3 × 6.5
N3 [O-Ring Seal]	P4
E [mm]	12
S1 [mm]	12
S2 [mm]	16.3
S3 [mm]	21
S4 [mm]	22
<b>Forces and Torques</b>	
Basic Load Ratings C [kN]	30.7
Basic Load Ratings C0 [kN]	57.7
Static Moment Ratings-Ma [N-m]	710.0
Static Moment Ratings-Mb [N-m]	710.0
Static Moment Ratings-Mc [N-m]	735.0
<b>Weight</b>	
Weight-Block [g]	685