
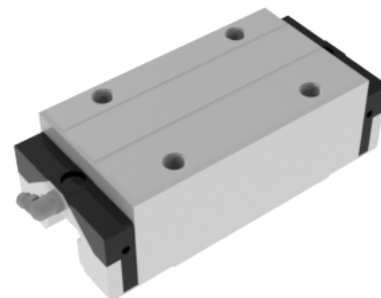



NHRC 25 ML

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NHRC 25 ML today!



Details

Size [mm] 25

Dimensions

W [mm] 48

L [mm] 105

L1 [mm] 86

h2 [mm] 34

P1 [mm] 50

P2 [mm] 35

M1 [mm] —

M x g2 M6 x 9

T [mm] 12

N1 M6 x 7.5

N2 M3 x 6.5

N3 [O-Ring Seal] P4

E [mm] 12

S1 [mm] 12

S2 [mm] 16.3

S3 [mm] 21

S4 [mm] 22

Forces and Torques

Basic Load Ratings C [kN] 30.7

Basic Load Ratings C0 [kN] 57.7

Static Moment Ratings-Ma [N-m] 710.0

Static Moment Ratings-Mb [N-m] 710.0

Static Moment Ratings-Mc [N-m] 735.0

Weight

Weight-Block [g] 685