
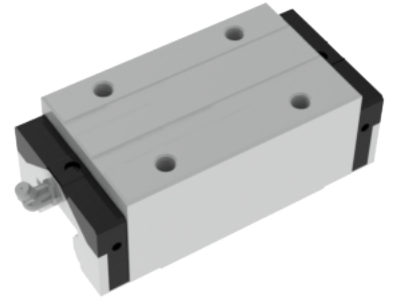



## NHRC 45 ML

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your NHRC 45 ML today!



|                                |              |
|--------------------------------|--------------|
| <b>Details</b>                 |              |
| Size [mm]                      | 45           |
| <b>Dimensions</b>              |              |
| W [mm]                         | 86           |
| L [mm]                         | 171.5        |
| L1 [mm]                        | 138.5        |
| h2 [mm]                        | 60.7         |
| P1 [mm]                        | 80           |
| P2 [mm]                        | 60           |
| M1 [mm]                        | —            |
| M × g2                         | M10 × 20     |
| T [mm]                         | 14           |
| N1                             | PT1/8 × 12.5 |
| N2                             | M6 × 10.5    |
| N3 [O-Ring Seal]               | P5           |
| E [mm]                         | 14           |
| S1 [mm]                        | 21.1         |
| S2 [mm]                        | 28.1         |
| S3 [mm]                        | 35           |
| S4 [mm]                        | 35           |
| <b>Forces and Torques</b>      |              |
| Basic Load Ratings C [kN]      | 89.5         |
| Basic Load Ratings C0 [kN]     | 169.1        |
| Static Moment Ratings-Ma [N-m] | 3460.0       |
| Static Moment Ratings-Mb [N-m] | 3460.0       |
| Static Moment Ratings-Mc [N-m] | 4430.0       |
| <b>Weight</b>                  |              |
| Weight-Block [g]               | 4060         |