
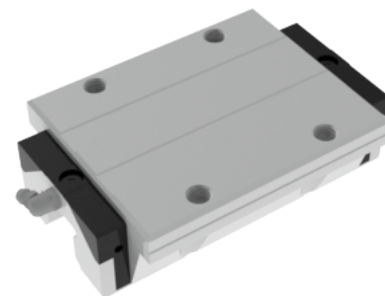



NHRC 25 FL

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NHRC 25 FL today!



Details	
Size [mm]	25
Dimensions	
W [mm]	70
L [mm]	105
L1 [mm]	86
h2 [mm]	30
P1 [mm]	45
P2 [mm]	57
M1 [mm]	M6 Thru Bolt
M x g2	M8 x 12
T [mm]	12
N1	M6 x 7.5
N2	M3 x 6.5
N3 [O-Ring Seal]	P4
E [mm]	12
S1 [mm]	8
S2 [mm]	12.3
S3 [mm]	23.5
S4 [mm]	24.5
Forces and Torques	
Basic Load Ratings C [kN]	30.7
Basic Load Ratings C0 [kN]	57.7
Static Moment Ratings-Ma [N-m]	710.0
Static Moment Ratings-Mb [N-m]	710.0
Static Moment Ratings-Mc [N-m]	735.0
Weight	
Weight-Block [g]	605