


NARC 30 FN Assembly

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NARC 30 FN Assembly today!

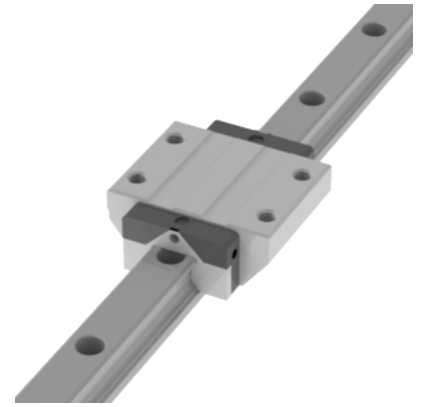

| | |
|--|----------|
| Dimensions | |
| H [mm] | 42 |
| W2 [mm] | 31 |
| Standard Caged Ball Block Four Mounting Holes | |
| Details | |
| Size [mm] | 30 |
| Dimensions | |
| W [mm] | 90 |
| L [mm] | 95.5 |
| L1 [mm] | 71.5 |
| h2 [mm] | 35.2 |
| P1 [mm] | 40 |
| P2 [mm] | 72 |
| M1 [mm] | M8 |
| M x g2 | M10 x 15 |
| T [mm] | 15 |
| N1 | M6 x 8.5 |
| N2 | M6 x 5 |
| N3 [O-Ring Seal] | P5 |
| E [mm] | 12 |
| S1 [mm] | 7.5 |
| S2 [mm] | 12 |
| S3 [mm] | 20.8 |
| S4 [mm] | 20.5 |
| Forces and Torques | |
| Basic Load Ratings C [kN] | 32.8 |
| Basic Load Ratings C0 [kN] | 53.7 |
| Static Moment Ratings-Ma [N-m] | 565.0 |
| Static Moment Ratings-Mb [N-m] | 565.0 |
| Static Moment Ratings-Mc [N-m] | 845.0 |
| Weight | |
| Weight-Block [g] | 1200 |
| Caged Ball Rail Top Mount | |
| Details | |
| Size [mm] | 30 |
| Dimensions | |
| W1 [mm] | 28 |
| H1 [mm] | 27 |
| P [mm] | 80 |
| D [mm] | 14 |
| d1 [mm] | 9 |
| g1 [mm] | 12 |
| Weight | |
| Weights-Rail [g/m] | 4380.0 |
| Caged Ball Rail Bottom Tapped Mount | |
| Details | |
| Size [mm] | 30 |
| Dimensions | |
| W1 [mm] | 28 |
| H1 [mm] | 27 |
| P [mm] | 80 |
| M x g3 | M8 x 15 |
| Weight | |
| Weights-Rail [g/m] | 4380.0 |