
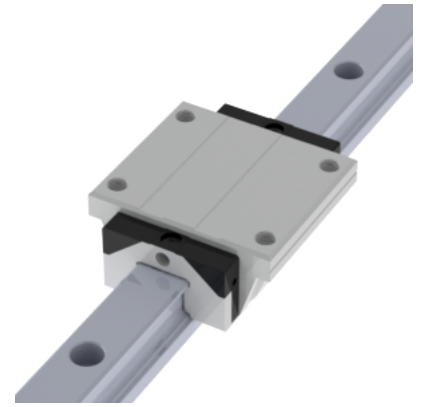


## NHRC 25 FN Assembly

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your NHRC 25 FN Assembly today!

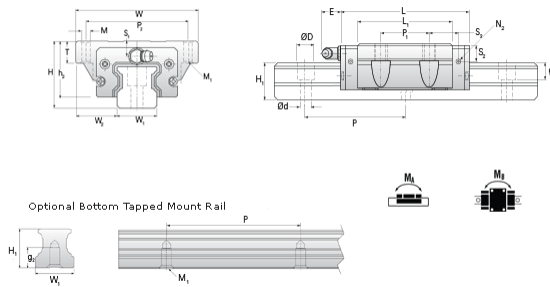

<b>Dimensions</b>	
H [mm]	36
W2 [mm]	23.5
<b>Standard Caged Ball Block Four Mounting Holes</b>	
<b>Details</b>	
Size [mm]	25
<b>Dimensions</b>	
W [mm]	70
L [mm]	81.2
L1 [mm]	62.2
h2 [mm]	30
P1 [mm]	45
P2 [mm]	57
M1 [mm]	M6 Thru Bolt
M x g2	M8 x 12
T [mm]	12
N1	M6 x 7.5
N2	M3 x 6.5
N3 [O-Ring Seal]	P4
E [mm]	12
S1 [mm]	8
S2 [mm]	12.3
S3 [mm]	11.6
S4 [mm]	12.6
<b>Forces and Torques</b>	
Basic Load Ratings C [kN]	24.8
Basic Load Ratings C0 [kN]	42.5
Static Moment Ratings-Ma [N-m]	385.0
Static Moment Ratings-Mb [N-m]	385.0
Static Moment Ratings-Mc [N-m]	540.0
<b>Weight</b>	
Weight-Block [g]	626
<b>Caged Ball Rail Top Mount</b>	
<b>Details</b>	
Size [mm]	25
<b>Dimensions</b>	
W1 [mm]	23
H1 [mm]	23
P [mm]	60
D [mm]	11
d1 [mm]	7
g1 [mm]	9
<b>Weight</b>	
Weights-Rail [g/m]	3020.0
<b>Caged Ball Rail Bottom Tapped Mount</b>	
<b>Details</b>	
Size [mm]	25
<b>Dimensions</b>	
W1 [mm]	23
H1 [mm]	23
P [mm]	60
M x g3	M6 x 12
<b>Weight</b>	
Weights-Rail [g/m]	3020.0