
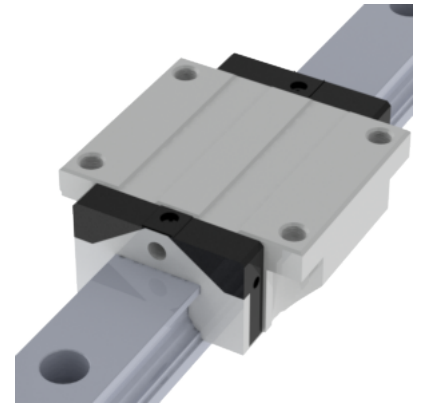


NHRC 45 FN Assembly

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NHRC 45 FN Assembly today!

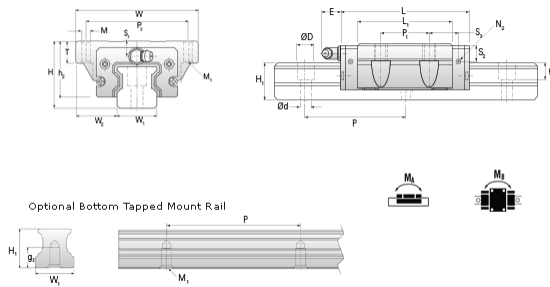

| | |
|------------------------------------------------------|---------------|
| Dimensions | |
| H [mm] | 60 |
| W2 [mm] | 37.5 |
| Standard Caged Ball Block Four Mounting Holes | |
| Details | |
| Size [mm] | 45 |
| Dimensions | |
| W [mm] | 120 |
| L [mm] | 135.5 |
| L1 [mm] | 102.5 |
| h2 [mm] | 50.7 |
| P1 [mm] | 80 |
| P2 [mm] | 100 |
| M1 [mm] | M10 Thru Bolt |
| M x g2 | M12 x 18 |
| T [mm] | 19 |
| N1 | PT1/8 x 12.5 |
| N2 | M6 x 10.5 |
| N3 [O-Ring Seal] | P5 |
| E [mm] | 14 |
| S1 [mm] | 11.1 |
| S2 [mm] | 18.1 |
| S3 [mm] | 17.3 |
| S4 [mm] | 17.3 |
| Forces and Torques | |
| Basic Load Ratings C [kN] | 71.3 |
| Basic Load Ratings C0 [kN] | 122.1 |
| Static Moment Ratings-Ma [N-m] | 1910.0 |
| Static Moment Ratings-Mb [N-m] | 1910.0 |
| Static Moment Ratings-Mc [N-m] | 3200.0 |
| Weight | |
| Weight-Block [g] | 2747 |
| Caged Ball Rail Top Mount | |
| Details | |
| Size [mm] | 45 |
| Dimensions | |
| W1 [mm] | 45 |
| H1 [mm] | 39 |
| P [mm] | 105 |
| D [mm] | 20 |
| d1 [mm] | 14 |
| g1 [mm] | 17 |
| Weight | |
| Weights-Rail [g/m] | 10530.0 |
| Caged Ball Rail Bottom Tapped Mount | |
| Details | |
| Size [mm] | 45 |
| Dimensions | |
| W1 [mm] | 45 |
| H1 [mm] | 39 |
| P [mm] | 105 |
| M x g3 | M12 x 19 |
| Weight | |
| Weights-Rail [g/m] | 10530.0 |