



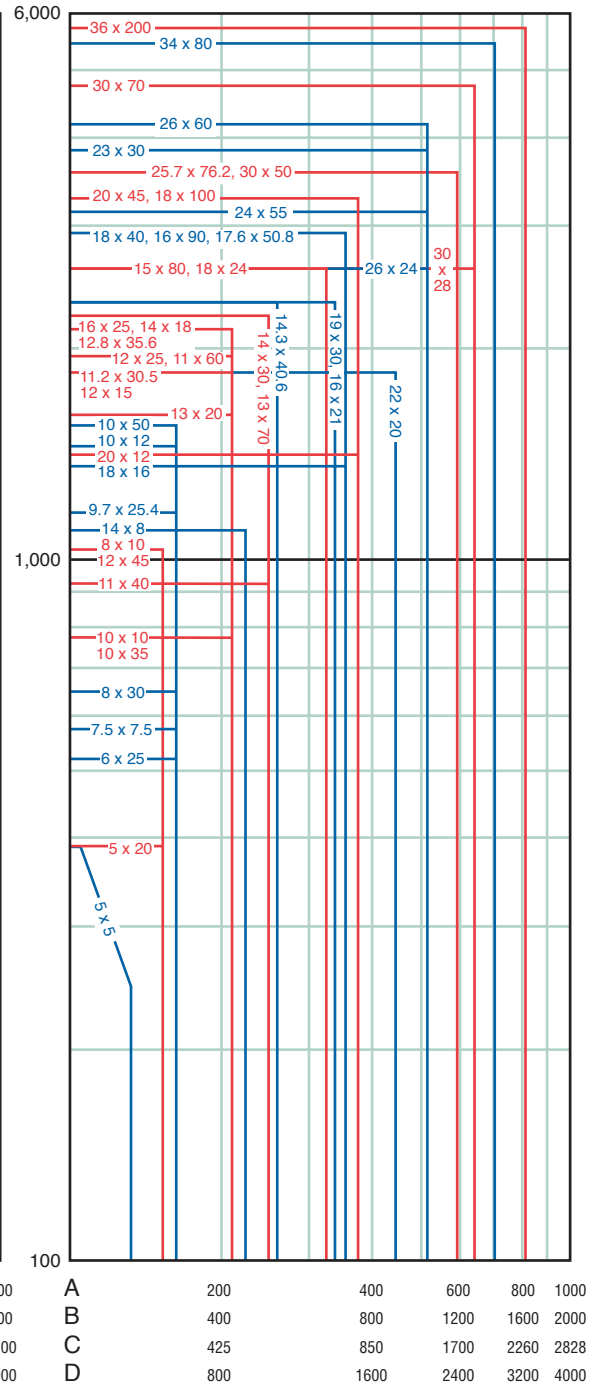

ISO METRIC THREAD

SPEEDY METRIC THREAD

METRIC LEAD SCREW AND NUT TECHNICAL DATA

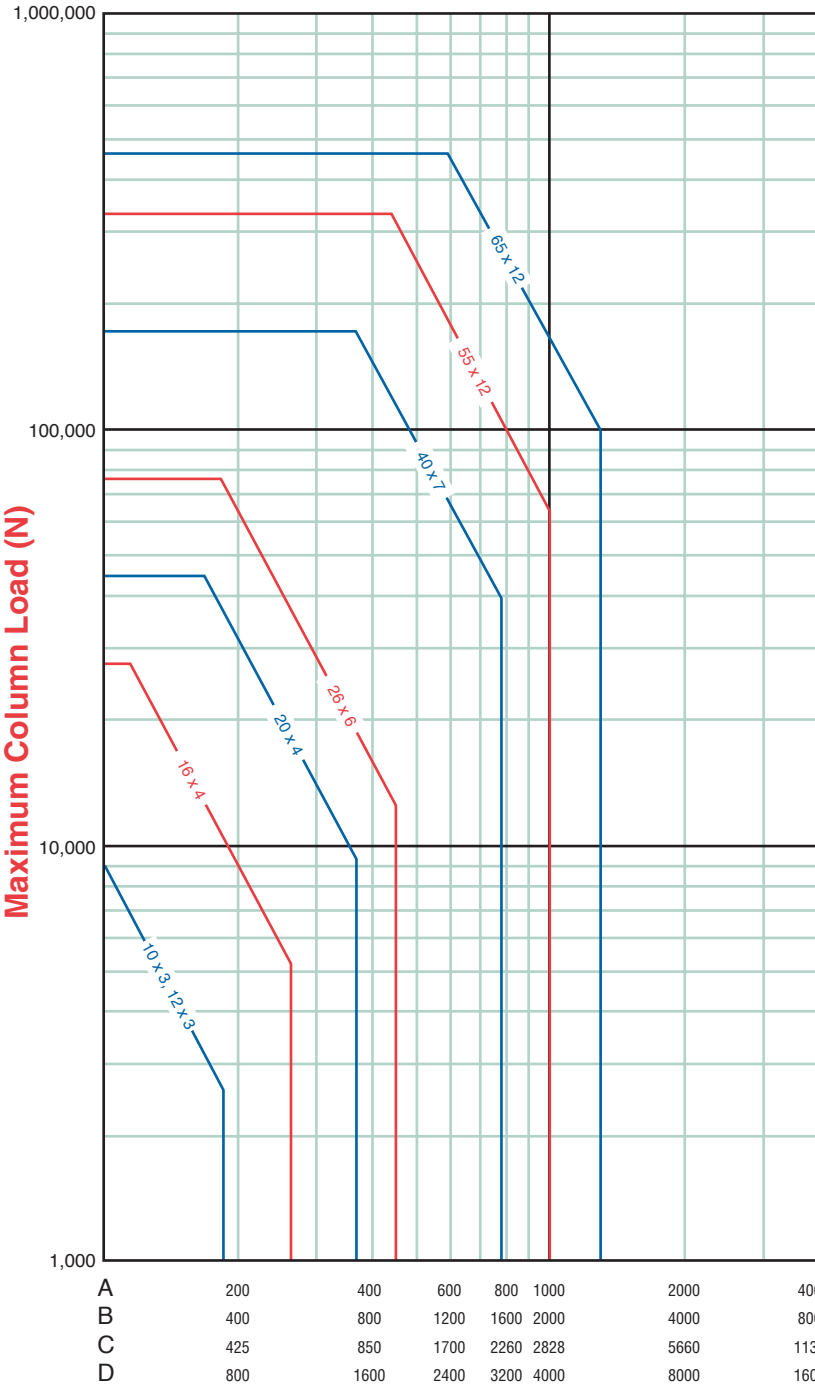


Maximum Length Between Bearings (mm)

NOTE: Metric Screws are limited by both Maximum Static Load and Slenderness Ratio

See Page 6 for Reference Description on "A-B-C-D" end fixity.

Metric to Inch Conversions:

1 Newton = .224 lbf 1mm = 0.039 in. 1 N•m = 8.85 in.-lb.

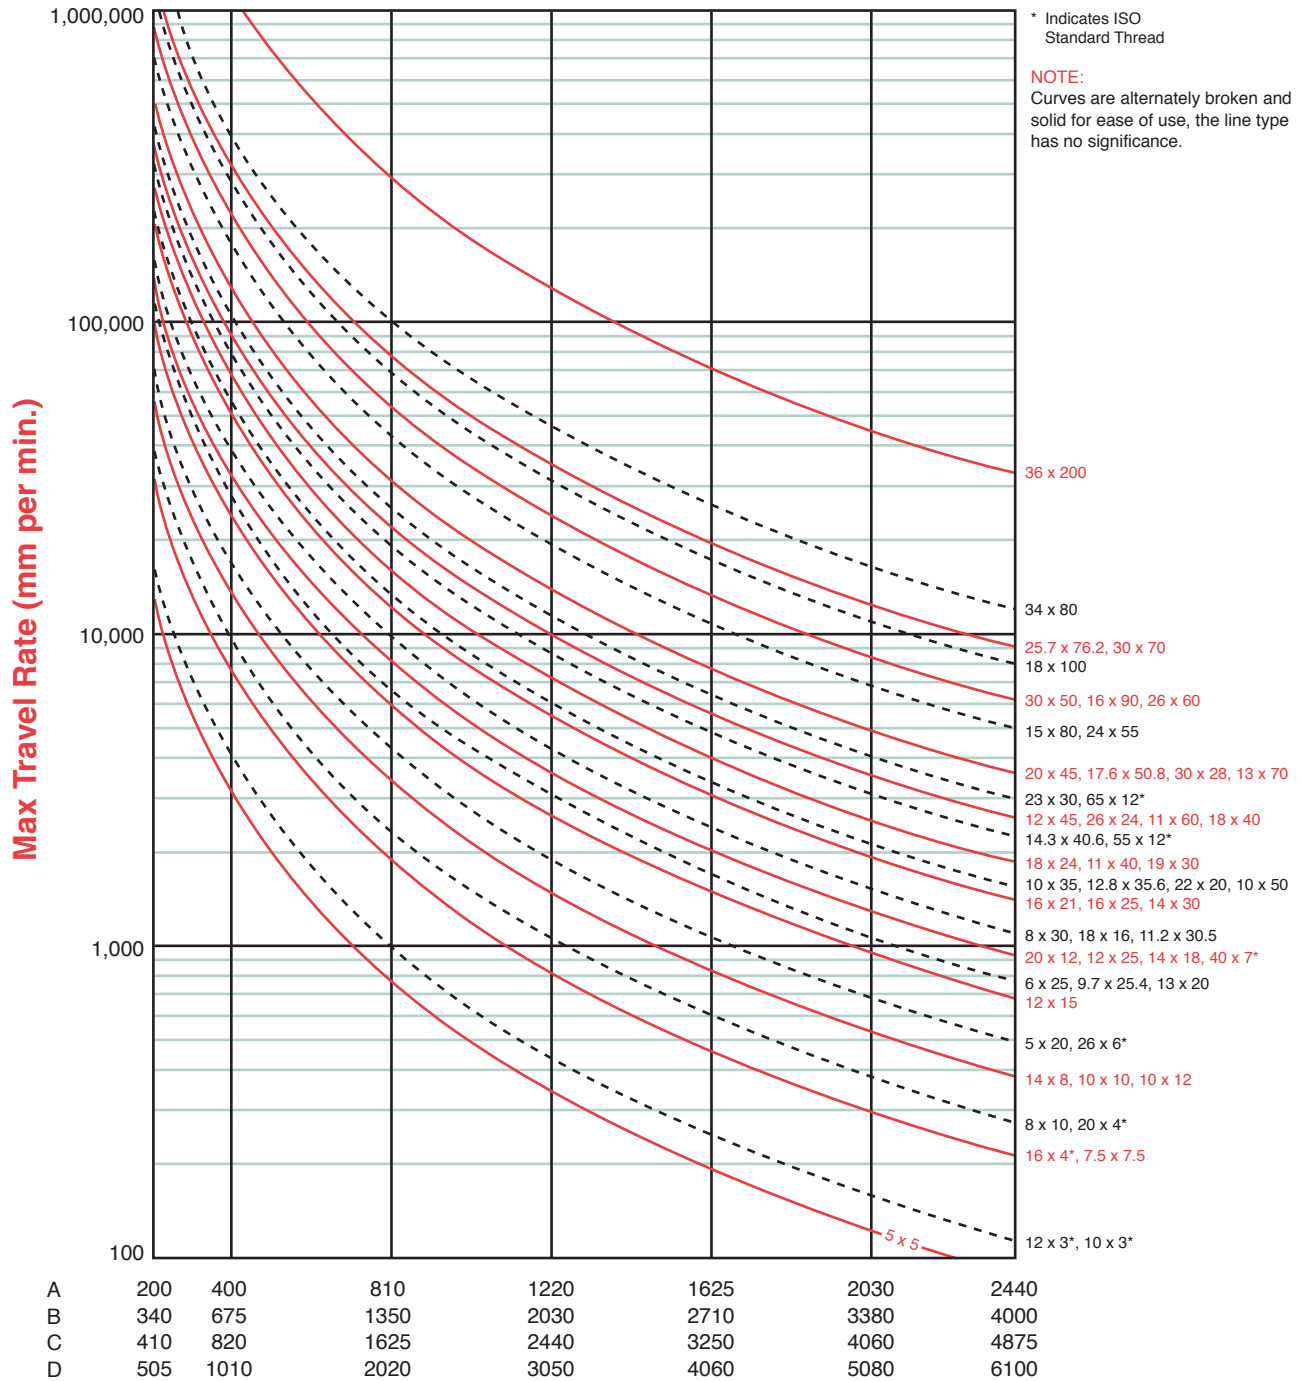

NOTE: Maximum Speed is limited to 80% of the calculated critical speed

See Page 6 for Reference Description on "A-B-C-D" end fixity.

Metric to Inch Conversions:

1 Newton = .224 lbf 1mm = 0.039 in. 1 N•m = 8.85 in.-lb.