


3-3/8" ACME THREAD

LEAD ACCURACY: ±0.0006 in./in.

LOAD CAPACITY (lbs.)	DYNAMIC	STATIC
BRONZE NUT	60,000	192,000

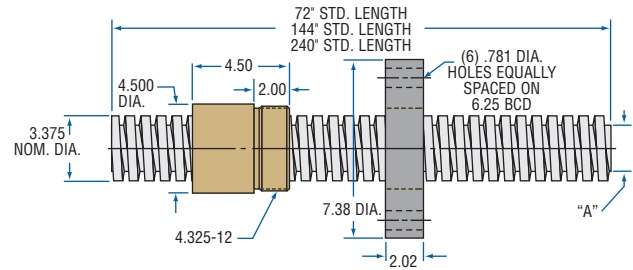

INCH ACME SCREW AND NUT TECHNICAL DATA

PRODUCT SPECIFICATIONS		SCREW SIZE	
		3³/₈"-1¹/₂	
Lead		.667	
Pitch		.667	
Starts		1	
Threads Per Inch		1 1/2	
Lash (Maximum Axial)		.020	
"A" – Root Diameter (min.)		2.652	
Weight (lbs./ft.)		20.15	
Thread Code		332	
Form		2G	
72" Standard Length Part No. *	RH	4140	12332
	Stainless	—	—
144" Standard Length Part No. *	RH	4140	13332
	Stainless	—	—
240" Standard Length Part No. *	RH	4140	10332
	Stainless	—	—


* Custom Lengths Available - See page 15 to specify length

BRONZ/AC BRONZE NUT		3 ³ / ₈ "-1 ¹ / ₂
Efficiency		34%
Torque to Raise 1 lb. (in.-lb.)		.312
Weight (lbs.)		11.62
Part No.	RH	20332
	LH	—

FLANGE - STEEL	3 ³ / ₈ "-1 ¹ / ₂
Weight (lbs.)	23.82
Standard Part No.	70740
No-Lash™ Part No.	73332

ACME SCREW ASSEMBLIES


These assemblies are shipped with screw, nut, flange, and bearing supports.



See page 41 for complete dimensions.

EZZE-MOUNT™ END BEARING SUPPORTS

A convenient solution for mounting acme screw assemblies.



Single or Double Bearing Universal Mount

Single or Double Bearing Flange Mount

EZZE-MOUNT™ available for: 3-3/8"-1-1/2

See page 214 for complete dimensions.

LUBRICANT

Prolong acme screw and nut performance with these special lubricants.



E-100 12 Oz. Acme Screw Spray Lubricant




PAG-1 1 lb. Acme Screw Grease

See page 14 for complete product details.

END MACHINING

Machining for Nook standard ends or custom requirement available.



See page 212 for complete product details.