


26mm ISO METRIC THREAD

LEAD ACCURACY: ±6.25µm/25mm

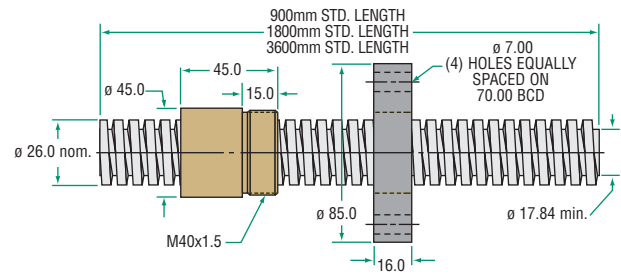

LOAD CAPACITY (N)	DYNAMIC	STATIC
BRONZE NUT	23304	74573
PLASTIC NUT	11652	11652

PRODUCT SPECIFICATIONS		SCREW SIZE	
		Tr 26x6	
Lead (mm)		6	
Pitch (mm)		6	
Starts		1	
Lash (Maximum Axial in mm)		0.30	
Weight (kg/m)		3.2	
Thread Code		904	
900mm Standard Length Part No. *	RH	4140	14904
	Stainless		54904
1800mm Standard Length Part No. *	RH	4140	15904
	Stainless		55904
3600mm Standard Length Part No. *†	RH	4140	16904
	Stainless		56904

* Custom Lengths Available - See page 47 to specify length
† Random Mill Length - can vary up to +50.8mm (2") in length


BRONZ/AC BRONZE NUT		Tr 26x6
Efficiency		39%
Torque to Raise 1 kN (N·m)		2.469
Weight (g)		440
Part No.	RH	20904
	LH	—

PLAST/AC PLASTIC NUT		Tr 26x6
Efficiency		44%
Torque to Raise 1 kN (N·m)		2.164
Weight (g)		79
Part No.	RH	30904
	LH	—

FLANGE - STEEL		Tr 26x6
Weight (kg)		.54
Part No.		72004

TRAPEZOIDAL SCREW ASSEMBLIES


These assemblies are shipped with screw, nut, flange, and bearing supports.



See page 41 for complete product details.

EZZE-MOUNT™ END BEARING SUPPORTS

A convenient solution for mounting trapezoidal screw assemblies.



Single or Double Bearing Universal Mount

Single or Double Bearing Flange Mount

EZZE-MOUNT™ available for: Tr 26x6
See page 214 for complete product details.

LUBRICANT

Prolong lead screw and nut performance with these special lubricants.



E-100 12 Oz. Lead Screw Spray Lubricant




PAG-1 1 lb. Lead Screw Grease

See page 14 for complete product details.

END MACHINING

Machining for Nook standard ends or custom requirement available.



See page 212 for complete product details.

METRIC LEAD SCREW AND NUT TECHNICAL DATA