


PowerAC 3/4"-10 TA

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your PowerAC 3/4"-10 TA today!

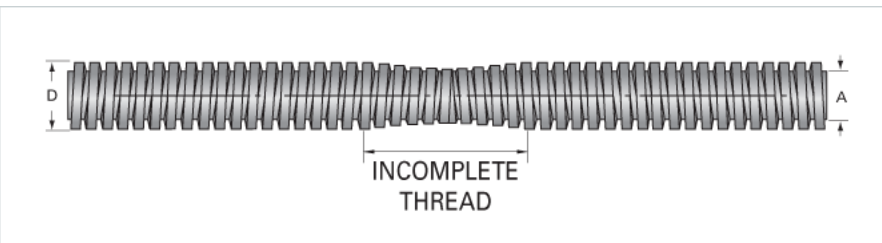

Product Info

| | |
|-----------------|-------------|
| Screw Code | 070 TA |
| Screw Direction | RH/LH |
| Screw Material | 4140 Series |

Details

| | |
|---|-------|
| Lead [in] | 0.100 |
| Starts | 1 |
| Pitch [in] | 0.100 |
| Turns Per Inch | 10 |
| Threads per Inch | 6 |
| Thread Code | 070 |
| Form | 2C |
| End Code for Types 1,2,3,5 [* Journals may show tracings of the thread] | 15 |
| End Code for Type 4 [* Journals may show tracings of the thread] | 8 |

Dimensions

| | |
|---|-------|
| A - Root Diameter Minimum [in] | 0.608 |
| D - Nominal Rod Diameter [in] | 0.750 |
| Incomplete Overlapping Thread Length [in] | 2.00 |
| Maximum Overall Length [in] | 72 |
| Maximum Useable LH & RH Thread [in] | 35.00 |

Weight

| | |
|----------------------|------|
| Weight Per Foot [lb] | 1.65 |
|----------------------|------|

Part Numbers

| | |
|------------------|---------------|
| 36" Part Number | TL3/4-10RS 36 |
| 72" Part Number | TL3/4-10RS 72 |
| 144" Part Number | |

Performance Specifications

| | |
|---------------------------|--------|
| Lead Accuracy +/- [in/in] | 0.0003 |
|---------------------------|--------|