


## PowerAC 1 1/4"-5 TA w/Plastic Nut

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerAC 1 1/4"-5 TA w/Plastic Nut today!

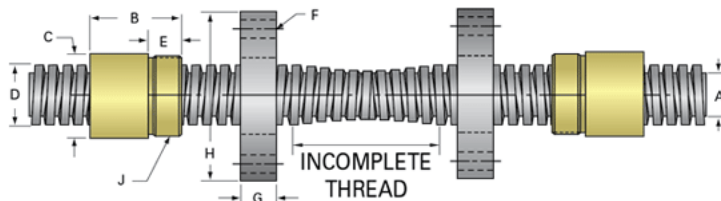

### Rolled Inch Twin-Lead Acme Screw (Twin-Lead Screw)Product Info

Screw Code	125 TA
Screw Direction	RH/LH
Screw Material	4140 Series

### (Twin-Lead Screw)Details

Lead [in]	0.200
Starts	1
Pitch [in]	0.200
Turns Per Inch	5
Threads per Inch	5
Thread Code	125
Form	2C
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	25
End Code for Type 4 [* Journals may show tracings of the thread]	16

### (Twin-Lead Screw)Dimensions

A - Root Diameter Minimum [in]	0.999
D - Nominal Rod Diameter [in]	1.250
Incomplete Overlapping Thread Length [in]	2.50
Maximum Overall Length [in]	144
Maximum Useable LH & RH Thread [in]	70.75

### (Twin-Lead Screw)Weight

Weight Per Foot [lb]	3.49
----------------------	------

### (Twin-Lead Screw)Part Numbers

36" Part Number	
72" Part Number	
144" Part Number	TL1-1/4-5RS 144

### (Twin-Lead Screw)Performance Specifications

Lead Accuracy +/- [in/in]	0.0003
---------------------------	--------

### Inch Acme Nut with Optional Flange

#### (Nut)Product Info

Part Number	40125
Thread Direction	LH
Type	Plastic

#### (Nut)Details

Lead [in]	0.200
Starts	1
Pitch [in]	0.200
Turns Per Inch	5
Lash (Maximum Axial) [in]	0.010
Nominal Rod Diameter [in]	1.250
Threads per Inch	5
Thread Code	125
Form	2C

#### (Nut)Dimensions

B [in]	1.75
C [in]	2.13
E [in]	0.81
F (n) Dia. [in]	(4) .397
F BCD [in]	3.440
G [in]	0.83
H [in]	4.20
J [in]	1.967-18

#### (Nut)Forces and Torques

Torque to Raise 1 lb. [in-lb]	0.092
-------------------------------	-------

#### (Nut)Flange Part Numbers

Flange No-Lash Part Number	73420
Flange Part Number	FLG7572

#### (Nut)Weight

Flange Weight [lb]	3.19
Nut Weight [lb]	0.19

<b>(Nut)Performance Specifications</b>		
Efficiency [%]		35
Lead Accuracy +/- [in/in]		0.0003
Dynamic Load Capacity [lb]		3906
Static Load Capacity [lb]		3906
<b>(Nut on Other Side)Product Info</b>		
Part Number		30125
Thread Direction		RH
Type		Plastic
<b>(Nut on Other Side)Details</b>		
Lead [in]		0.200
Starts		1
Pitch [in]		0.200
Turns Per Inch		5
Lash (Maximum Axial) [in]		0.010
Nominal Rod Diameter [in]		1.250
Threads per Inch		5
Thread Code		125
Form		2C
<b>(Nut on Other Side)Dimensions</b>		
B [in]		1.75
C [in]		2.13
E [in]		0.81
F (n) Dia. [in]		(4) .397
F BCD [in]		3.440
G [in]		0.83
H [in]		4.20
J [in]		1.967-18
<b>(Nut on Other Side)Forces and Torques</b>		
Torque to Raise 1 lb. [in-lb]		0.092
<b>(Nut on Other Side)Flange Part Numbers</b>		
Flange No-Lash Part Number		73420
Flange Part Number		FLG7572
<b>(Nut on Other Side)Weight</b>		
Flange Weight [lb]		3.19
Nut Weight [lb]		0.19
<b>(Nut on Other Side)Performance Specifications</b>		
Efficiency [%]		35
Lead Accuracy +/- [in/in]		0.0003
Dynamic Load Capacity [lb]		3906
Static Load Capacity [lb]		3906