


PowerTrac SRT 0631 - 0200 RH/LH

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your PowerTrac SRT 0631 - 0200 RH/LH today!

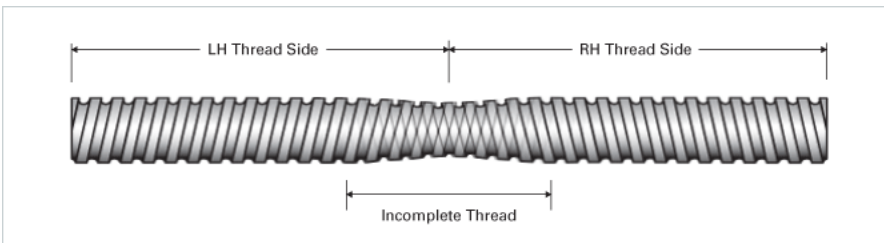

Product Info

| | |
|------------------|------------------|
| Screw Code | 0631-0200 SRT TA |
| Precision | SRT |
| Screw Material | 4150 |
| Thread Direction | RH/LH |

Details

| | |
|---|-------|
| Ball Circle Diameter [in] | 0.631 |
| Lead [in] | 0.200 |
| Root Diameter [in] | 0.500 |
| Incomplete Overlapping Thread Length [in] | 2.50 |
| Maximum Overall Length [in] | 72 |
| Maximum Useable LH & RH Thread [in] | 34.75 |
| End Code for Types 1,2,3,5 [* Journals may show tracings of the thread] | 12 |
| End Code for Type 4 [* Journals may show tracings of the thread] | 8 |

Weight

| | |
|------------------------|------|
| Screw Weight [lb./ft.] | 0.82 |
|------------------------|------|

Performance Specifications

| | |
|-----------------------------|-------|
| Lead Accuracy +/- [in./ft.] | 0.004 |
|-----------------------------|-------|