


PowerTrac 2000 - 0200 SGT TA, with SSN Ball Nuts, Flanged

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your PowerTrac 2000 - 0200 SGT TA, with SSN Ball Nuts,





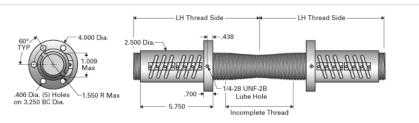

Inch Twin-Lead Ball Screw	
(Twin-Lead Screw)Product Info	0000 0000 007 74
Screw Code	2000-0200 SGT TA
Precision	SGT
Screw Material	4150
Thread Direction	RH/LH
(Twin-Lead Screw)Details	0.000
Ball Circle Diameter [in]	2.000
Lead [in]	0.200
Root Diameter [in]	1.849
Incomplete Overlapping Thread Length [in]	0.50
Maximum Overall Length [in]	140
Maximum Useable LH & RH Thread [in]	69.75
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	45
End Code for Type 4 [* Journals may show tracings of the thread]	28
(Twin-Lead Screw)Weight	
Screw Weight [lb./ft.]	9.90
(Twin-Lead Screw)Performance Specifications	
Lead Accuracy +/- [in./ft.]	0.001
Inch Ball Nut, for SGT and XPR, Ground Accuracy, Preloaded, Fixed, SSN	
(Nut)Product Info	
Ball Nut Number	SSN10267
Thread Direction	LH
(Nut)Details	
Ball Circle Diameter [in]	2.000
Lead [in]	0.200
Nominal Ball Diameter [in]	0.141
Root diameter [in]	1.849
(Nut)Forces and Torques	11010
Torque to Raise 1 lb. [in-lb]	0.035
(Nut)Flange Part Numbers	0.000
Flange Part Number	INTEGRAL
(Nut)Wiper Part Numbers	INTEGRAL
Wiper Kit Part Number	ELASTOMER
(Nut)Weight	LEASTOWILIN
Nut Weight [lb]	4.50
(Nut)Performance Specifications	4.50
Maximum Adjustable Preload [lb]	6 50
Spring Rate x 10 ⁶ [lb./in.]	6.50 6181
Dynamic Load [lb]	
Static Load [lb]	65903
Inch Ball Nut, for SGT, Ground Accuracy, Preloaded, Fixed, SSN	
(Nut on Other Side)Product Info	00110000
Ball Nut Number	SSN0396
Thread Direction	RH
(Nut on Other Side)Details	0.000
Ball Circle Diameter [in]	2.000
Lead [in]	0.200
Nominal Ball Diameter [in]	0.141
Root diameter [in]	1.849
(Nut on Other Side)Forces and Torques	
Torque to Raise 1 lb. [in-lb]	0.035
(Nut on Other Side)Flange Part Numbers	
Flange Part Number	INTEGRAL
(Nut on Other Side)Wiper Part Numbers	
Wiper Kit Part Number	ELASTOMER
(Nut on Other Side)Weight	
Nut Weight [lb]	4.50
(Nut on Other Side)Performance Specifications	
Maximum Adjustable Preload [lb]	
Spring Rate x 10 ⁶ [lb./in.]	6.50
1 0	*****

Dynamic Load [lb] Static Load [lb]

6181 65903