
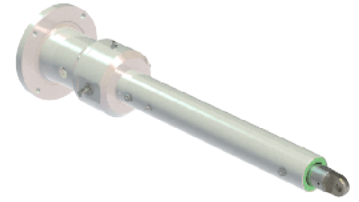


## ILA-5 HD

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your ILA-5 HD today!

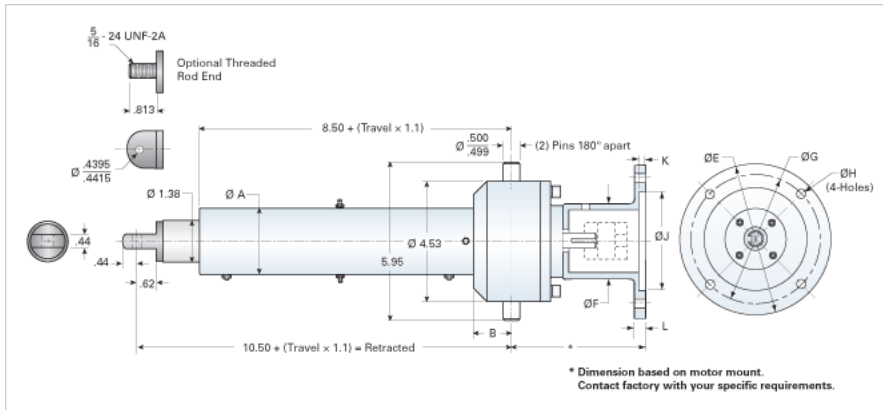

### Performance Specifications

|                              |      |
|------------------------------|------|
| Maximum Travel Rate [in/min] | 951  |
| Dynamic Capacity [lb]        | 1000 |
| Maximum Input Torque [in-lb] | 35   |

### Dimensions

|   |      |
|---|------|
| A | 2.25 |
| B | 1.38 |
| C |      |
| D |      |

### Details

|                                |               |
|--------------------------------|---------------|
| Ball Screw                     | 0631-0200 SRT |
| Input Turns per Inch Of Travel | 5             |
| Torque to Raise 1 lb. [in-lb]  | 0.035         |
| Screw Lead [in]                | 0.200         |
| Root Diameter [in]             | 0.500         |
| Max Capacity [lb]              | 1000          |
| Max HP [hp]                    | 1             |
| Gear Ratio                     | 1:1           |

### Weight

|                         |      |
|-------------------------|------|
| Basic Weight [lb]       | 29   |
| Per Inch of Travel [lb] | 0.87 |