ActionJac ILAK-100 HD

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ActionJac ILAK-100 HD today!

2D/3D CAD ONLINE

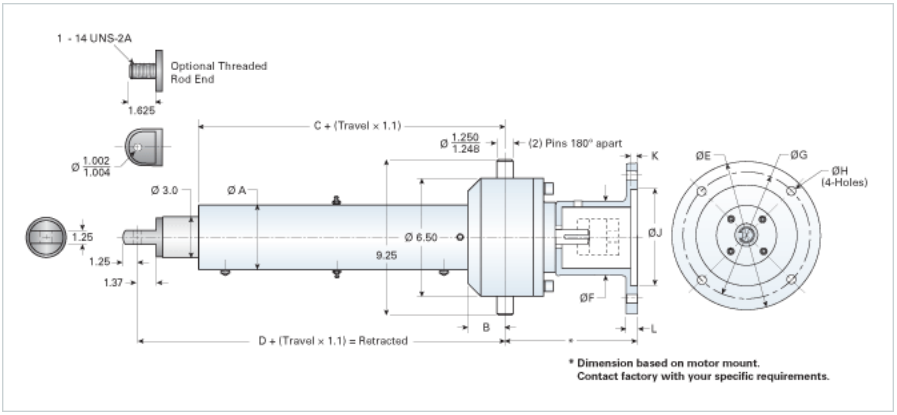

Performance Specifications	
Maximum Travel Rate [in/min]	946
Dynamic Capacity [lb]	9000
Maximum Input Torque [in-lb]	756
Dimensions	
A	6.5
B	2
C	14.18
D	17.14
Details	
Ball Screw	1500-0473 SRT
Input Turns Per Inch Of Travel	2.11
Torque Per Lb. [in-lb]	0.084
Screw Lead [in]	0.473
Root Diameter [in]	1.140
Max Capacity [lb]	9000
Max HP [hp]	5
Gear Ratio	1:1
Weight	
Basic Weight [lb]	89
Per Inch of Travel [lb]	2.08