




Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your DD-105-A5/05XX today!

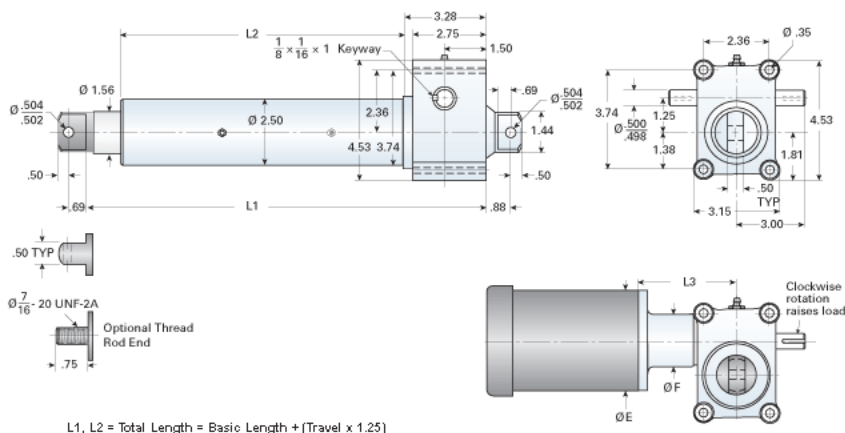

Performance Specifications	
Travel Rate [in/min]	69
Dynamic Capacity [lb]	850
Motor Horse Power (ref.) [hp]	0.5
Std. Brake Torque [ft-lb]	3
Approximate Stopping Distance No Load [in]	0.08
Maximum Rod Reaction Torque [in-lb]	79
Details	
Gear Ratio	5:1
Input Turns Per Inch Of Travel	25
Torque To Raise 1 lb. [in-lb]	0.0225
Max Capacity [lb]	2000
Max HP [hp]	0.5
Weight	
Basic Weight [lb]	15
Per Inch of Travel [lb]	0.76
Tube Dimensions	
L1 Basic Length [in]	8.25
L2 Basic Length [in]	4.25
NEMA 42 Dimensions	
L3 [in]	4.48
E [in]	4.63
F [in]	2.69
NEMA 48 Dimensions	
L3 [in]	4.48
E [in]	4.63
F [in]	3.12
NEMA 56C Dimensions	
L3 [in]	5.71
E [in]	6.63
F [in]	3.75
NEMA 182TC Dimensions	
L3 [in]	-
E [in]	-
F [in]	-
NEMA 184TC Dimensions	
L3 [in]	-
E [in]	-
F [in]	-
NEMA 213TC Dimensions	
L3 [in]	-
E [in]	-
F [in]	-