



Excel TEP-12-OPN

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your Excel TEP-12-OPN today!



* Lubrication holes for blocks up to 1/2" have flush lube fitting; 5/8" and above are 1/4 - 28 tapped hole with set screw

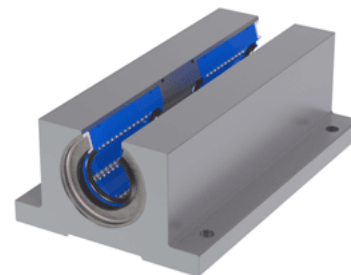

Product Info

Nominal Shaft Diameter [in]	$\frac{3}{4}$
Part Number	TEP-12-OPN

Dimensions

A +/-0.001 [in]	0.937
B [in]	$2\frac{3}{4}$
C [in]	$4\frac{1}{2}$
D [in]	$1\frac{14}{25}$
E +/-0.005 [in]	2.375
F +/-0.005 [in]	3.500
G [in]	$1\frac{7}{8}$
J [in]	$\frac{5}{16}$
K [in]	$\frac{7}{16}$
H - Bolt	#8
H - Hole [in]	0.19

Weight

Weight [lb]	1
-------------	---

Performance Specifications

Dynamic Load Maximum [lb]	796
Dynamic Load Normal [lb]	772
Static Load Maximum [lb]	624
Static Load Normal [lb]	558