


## QSSR 80

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your QSSR 80 today!

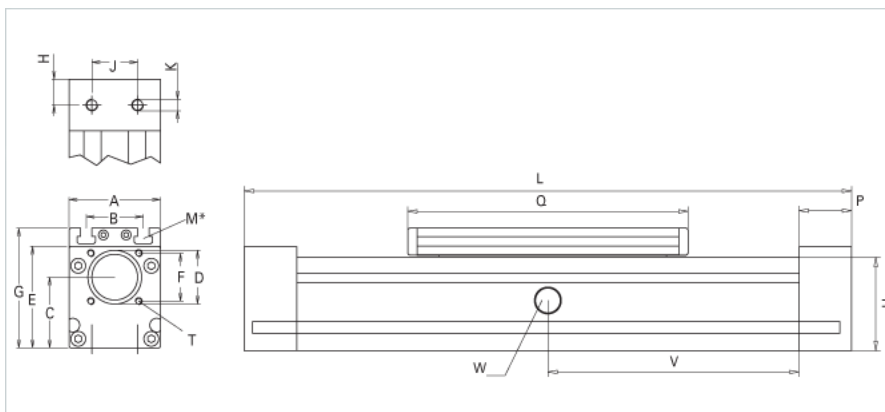

<b>Details</b>	
Size	80
<b>Dimensions</b>	
Basic Length L [mm]	350
A [mm]	80
B [mm]	50
C [mm]	62
D [mm]	47
G [mm]	106
H [mm]	22.5
J [mm]	40
K	M10
M	M8
P [mm]	45
Q [mm]	250
T	M6
U [mm]	80
<b>Forces and Torques</b>	
Fy [N] 10000 km	2550
Fz [N] 10000 km	6050
Mx [Nm] 10000 km	75
My [Nm] 10000 km	430
Mz [Nm] 10000 km	392
Fy [N] 5000 km	3570
Fz [N] 5000 km	8500
Mx [Nm] 5000 km	107
My [Nm] 5000 km	604
Mz [Nm] 5000 km	550
<b>Geometrical moments of inertia of aluminum profile</b>	
Elastic modulus [N/mm <sup>2</sup> ]	70000
Ix [mm <sup>4</sup> ]	1400000
Iy [mm <sup>4</sup> ]	1660000
<b>Weight</b>	
Weight Per 100 mm [kg]	0.8
Basic Weight [kg]	5.7