
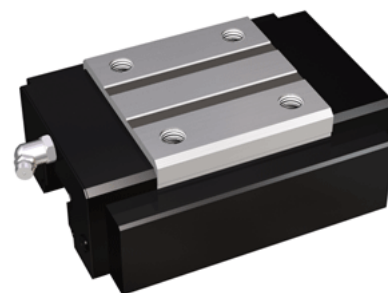


NH55TR

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NH55TR today!

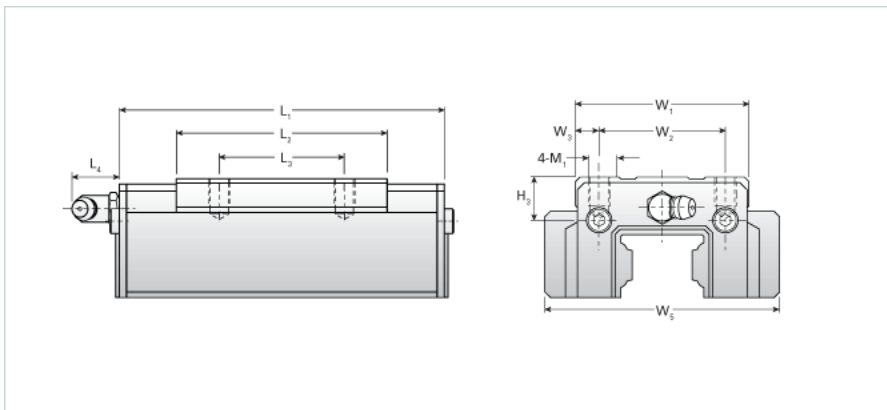

Details

| | |
|-----------|----|
| Size [mm] | 55 |
|-----------|----|

Dimensions

| | |
|---------|--------|
| H3 [mm] | 18 |
| L1 [mm] | 189 |
| L2 [mm] | 124 |
| L3 [mm] | 75 |
| L4 [mm] | 18 |
| M1 x l | M12X18 |
| W1 [mm] | 100 |
| W2 [mm] | 75 |
| W3 [mm] | 12.5 |
| W5 [mm] | 130 |

Forces and Torques

| | |
|----------------------------------|--------|
| Basic Load Ratings C [kN] | 90.02 |
| Basic Load Ratings C [lbf] | 20232 |
| Basic Load Ratings C0 [kN] | 137.09 |
| Basic Load Ratings C0 [lbf] | 30811 |
| Static Moment Ratings-Ma [kN-m] | 2.22 |
| Static Moment Ratings-Ma [lb-in] | 19617 |
| Static Moment Ratings-Mb [kN-m] | 2.22 |
| Static Moment Ratings-Mb [lb-in] | 19617 |
| Static Moment Ratings-Mc [kN-m] | 4.25 |
| Static Moment Ratings-Mc [lb-in] | 37671 |

Weight

| | |
|-------------------|------|
| Weight-Block [kg] | 4.50 |
|-------------------|------|

Grease Fitting

| | |
|----------------------------|----------|
| Grease Fitting Part Number | B-PT 1/8 |
|----------------------------|----------|